




SIGNATURE
COLLECTIONS





NYLON COMMERCIAL CARPET TILES

TORNADO

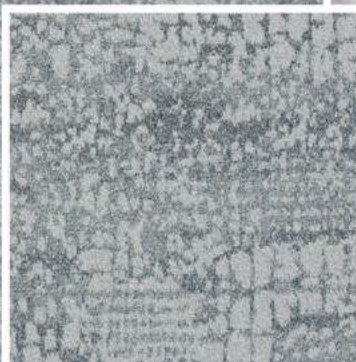

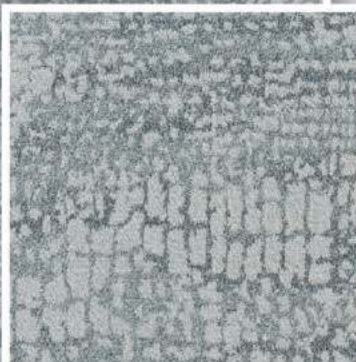

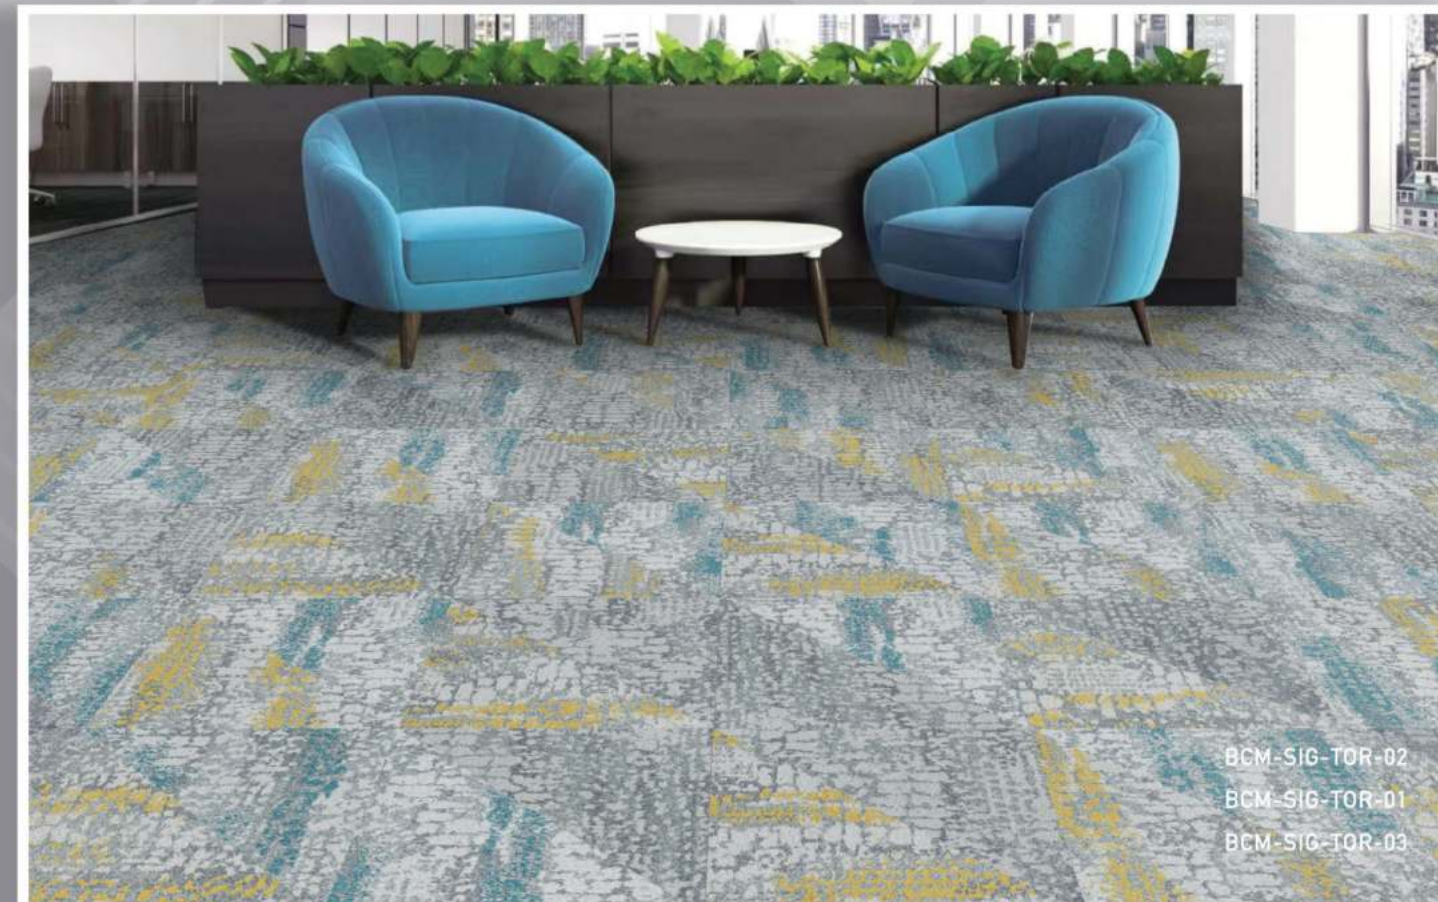


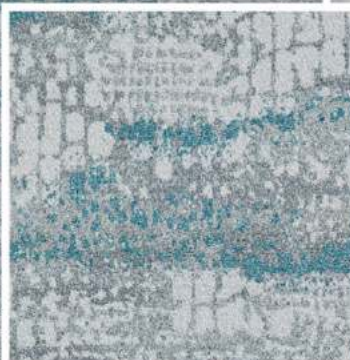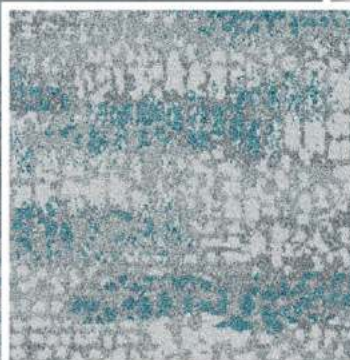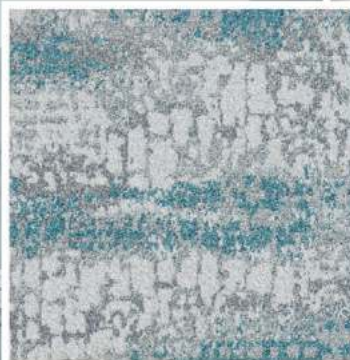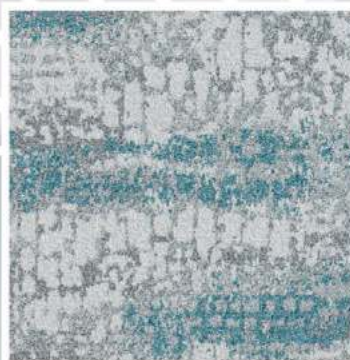




BCM-SIG-TOR-03
BCM-SIG-TOR-01



BCM-SIG-TOR-02
BCM-SIG-TOR-03
BCM-SIG-TOR-06

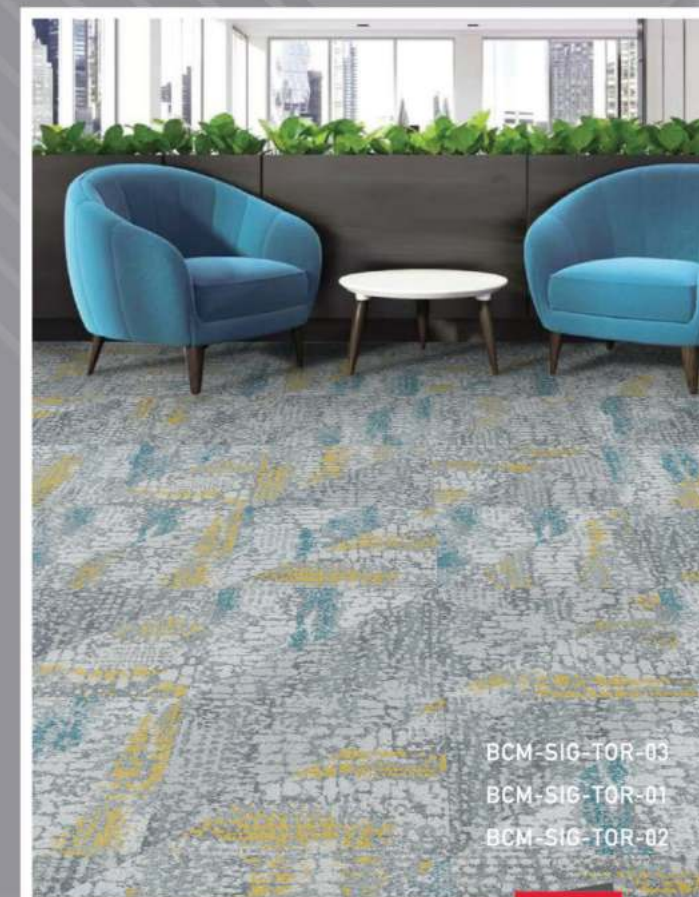

BCM-SIG-TOR-03
BCM-SIG-TOR-01
BCM-SIG-TOR-02

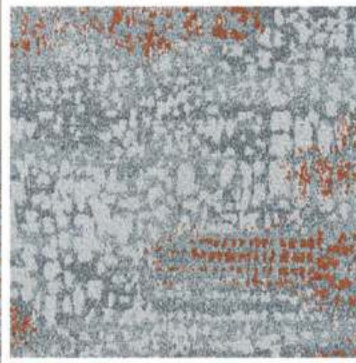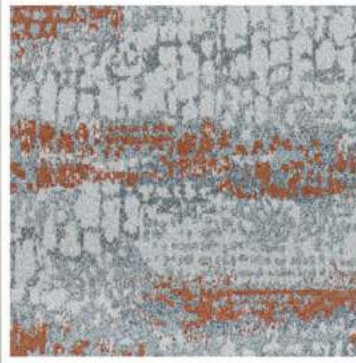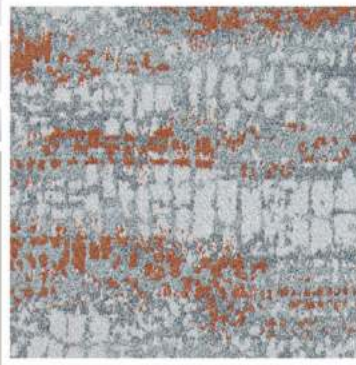





BCM-SIG-TOR-04
BCM-SIG-TOR-05



BCM-SIG-TOR-04
BCM-SIG-TOR-01
BCM-SIG-TOR-02



BCM-SIG-TOR-04
BCM-SIG-TOR-02

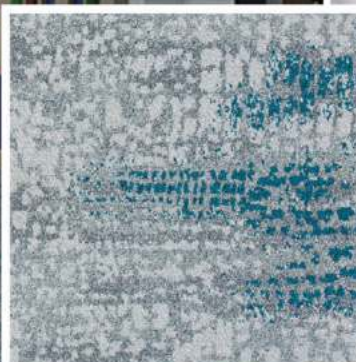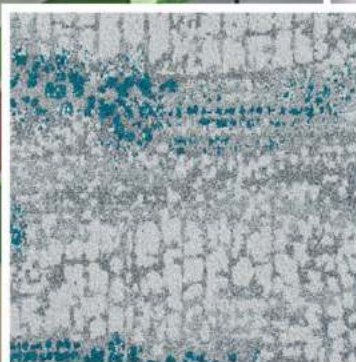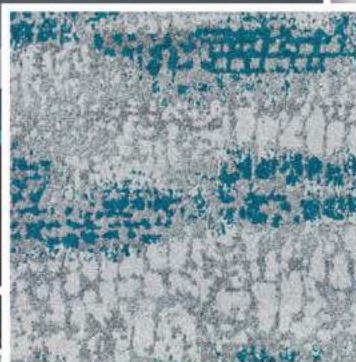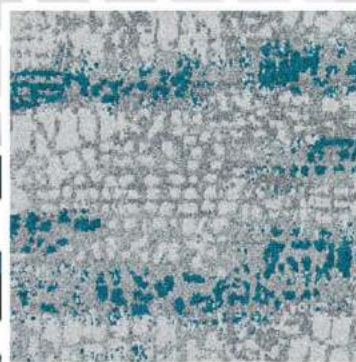


BCM-SIG-TOR-05
BCM-SIG-TOR-01
BCM-SIG-TOR-02
BCM-SIG-TOR-06



BCM-SIG-TOR-05
BCM-SIG-TOR-01
BCM-SIG-TOR-06





BCM-SIG-TOR-05
BCM-SIG-TOR-01
BCM-SIG-TOR-02

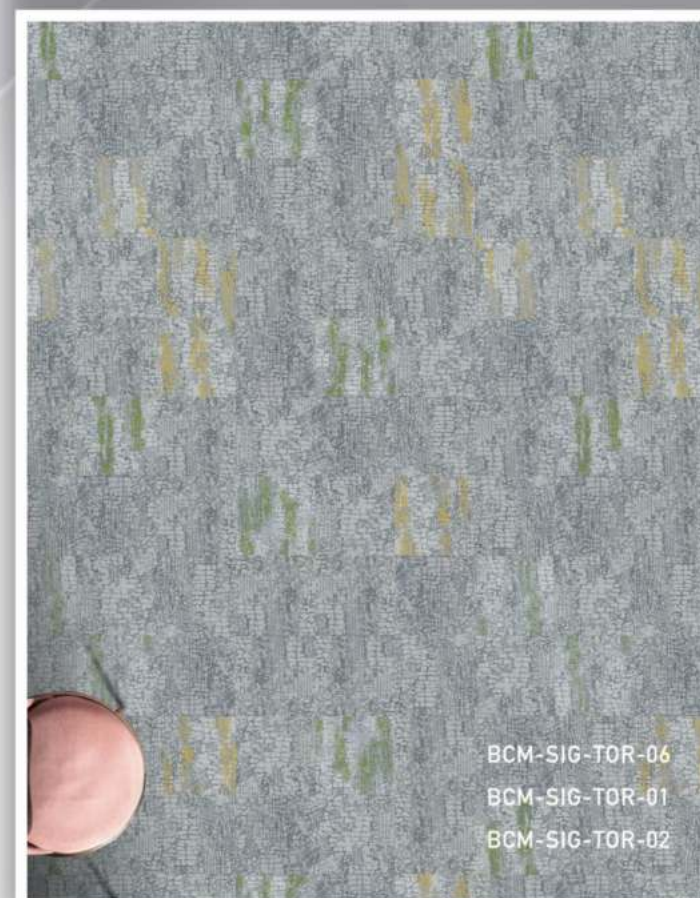



- 10 Years Wear Warranty
- Stain Resistance
- Soil Resistance
- Color Fastness Resistance

SIGNATURE
COLLECTIONS
NYLON COMMERCIAL CARPET TILES

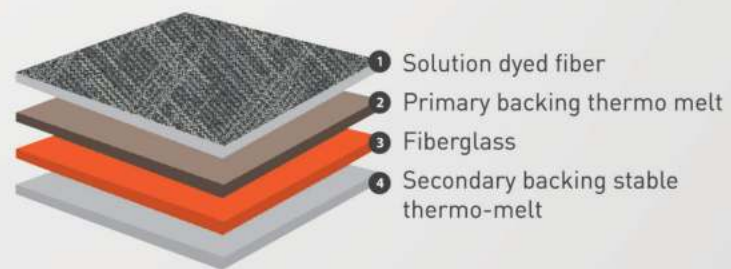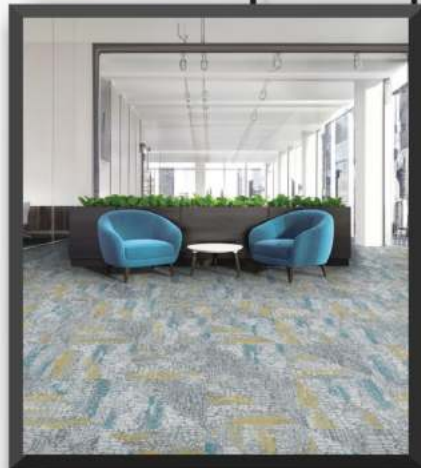

TORNADO

SIGNATURE
COLLECTIONS
NYLON COMMERCIAL CARPET TILES

Specifications

Description	SDT Tip-sheared Patterned colorpoint Carpet Tile
Face Fiber	100% S/D Nylon[contains anti-static fire, permanent Anti-static property]
Dye method	Solution dyed
Gauge	1/12
Pile height	4+-0.5mm
Pile weight:	700g/m2+-5%
Size	50cm x 50cm
1st backing	PP Non-woven fabric
Backing	Eco-friendly PE backing
Surface	Anti-soil treatment
Quality standard	EN985-Test A(2001);EN ISO 9405;EN1307(2014)+A3(2018)
Flame retardant	EN 13501-1(2019) Bfl/s1
Antibacterial	AATCC 174-II(2016)
Environmental	CRI No:GLP100718
Anti-static	ISO 6356(2012)
Acoustics	EN ISO 354:2003



Performance

Wear Classification	Heavy commercial
Wear Warranty	10 Years