

LIVIN' AMBIENT



SCRATCH
GUARD
UP TO 10x MORE SCRATCH RESISTANT

UNICLIC®
MULTIFIT
PATENTED TECHNOLOGY



QUICK-STEP®
FLOOR DESIGNERS

TABLE OF CONTENTS



LIVYN | AMBIENT



03

Am - Click - Cream Travertin
QS-AMCL40046



04

Am - Click - Light Concrete
QS-AMCL40049



05

Am - Click - Marble Carrara White
QS-AMCL40136




06

Am - Click - Light Grey Travertin
QS-AMCL40047



07

Am - Click - Vibrant Medium Grey
QS-AMCL40138



08

Am - Click - Minimal Taupe
QS-AMCL40141



09

Am - Click - Vibrant Sand
QS-AMCL40137



10

Am - Click Plus - Cream Travertin
QS-AMCP40046



11

Am - Click Plus - Click Grey Slate
QS-AMCL40046




12

Am - Click Plus - Light Grey Travertin
QS-AMCP40047




13

Am - Click Plus - Black slate
QS-AMCP40035




14

Am - Click Plus - Minimal Taupe
QS-AMCP40141



15

Amb - Light Concrete
QS-AMCP40049




16

Am - Click Plus - Vibrant Medium
Grey
QS-AMCP40138



17

Am - Click - Marble Carrara White
QS-AMCP40136



18

Am - Click Plus - Click Grey Slate
QS-AMCL40034



AMBIENT



1300x320x4.5mm

QS-AMCL40046

Am - Click - Cream Travertin

The Quick-Step Vinyl Flex PVC tile in Cream Travertin from the Ambient collection conveys all the sophistication of the tones found in natural materials. The matte surface and natural textures enhance the interior and highlight all its qualities. This type of flooring is a perfect fit for any design style and is applicable in various types of spaces. This water-resistant, tile-style PVC with a bevel has a beige color. The flooring is resistant to mechanical damage and well-protected against wear and tear.

AMBIENT



1300x320x4.5mm

QS-AMCL40049

Am - Click - Light Concrete

The Quick Step Livyn Ambiente Click Light Concrete collection features exceptional vinyl flooring that captures the essence of natural concrete while providing outstanding comfort and durability. The Quick Step Livyn Ambiente Click Light Concrete tiles boast an expressive, tactile surface with captivating color variations that enhance any interior design. Their matte finish and realistic texture add depth to spaces, making them suitable for various design styles.





AMBIENT



1300x320x4.5mm

QS-AMCL40136

Am - Click - Marble Carrara White

The remarkable Quick-Step Livyn Ambient Marble Carrara White is a stylish and hard-wearing floor. It has been constructed with high-performance in mind, benefitting from an ultra-strong core. Its surface protects against scratches and stains and it benefits from a 100% waterproof design. This means you can install it in any area of the home, including the bathroom.

One of the best features of this floor is that it is easy to install. It comes with an exclusive Uniclic system, allowing you to connect the floor by simply clicking it together.



AMBIENT




1300x320x4.5mm

QS-AMCL40047

Am - Click - Light Grey Travertin

Quick-Step Livyn Light Grey Travertin Ambient is a collection of luxury vinyl floors combining the natural look and feel of wood or stone with all the practical benefits of vinyl tiles

- Fully Water Resistant.
- Scratch Guard Protected.
- Superior Stain Resistant Surface(Stain Guard)
- Quiet Underfoot.
- Can be laid over Underfloor Heating.

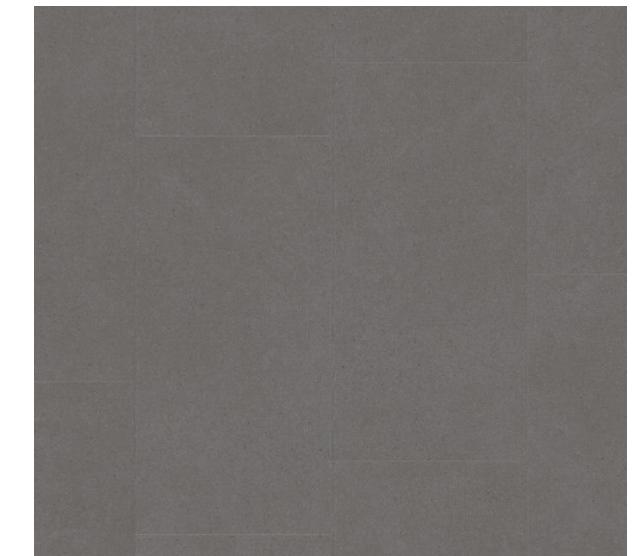AMBIENT

1300x320x4.5mm

QS-AMCL40138


Am - Click - Vibrant Medium Grey

Quick-Step Livyn Ambiant Vibrant Medium Grey is designed to look like a natural stone floor with its deep grain textures and pattern. The Livyn range is soft to the touch and warm underfoot - making it ideal throughout the home. The Vibrant Medium Grey flooring is highly water-resistant, is suitable for underfloor heating, is hard-wearing. This flooring is installed by floating it over an underlay and with its built-in click system, there's no need for a hammer or tapping block, making installation quick and easy.





AMBIENT

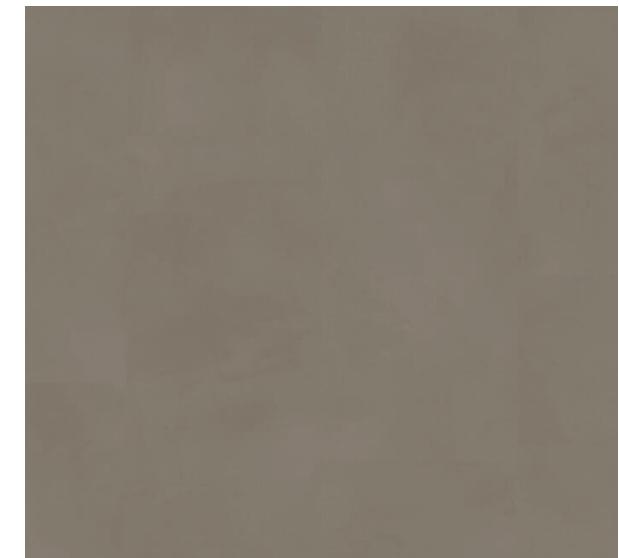

1300x320x4.5mm


QS-AMCL40141

Am - Click - Minimal Taupe

Quick-Step Livyn Ambient Click Minimal Taupe is designed to look like a natural stone floor with its deep grain textures and pattern. The Livyn range is soft to the touch and warm underfoot - making it ideal throughout the home. The Minimal Taupe flooring is highly water-resistant, is suitable for underfloor heating, is hard-wearing. This flooring is installed by floating it over an underlay and with its built-in click system, there's no need for a hammer or tapping block, making installation quick and easy.



AMBIENT

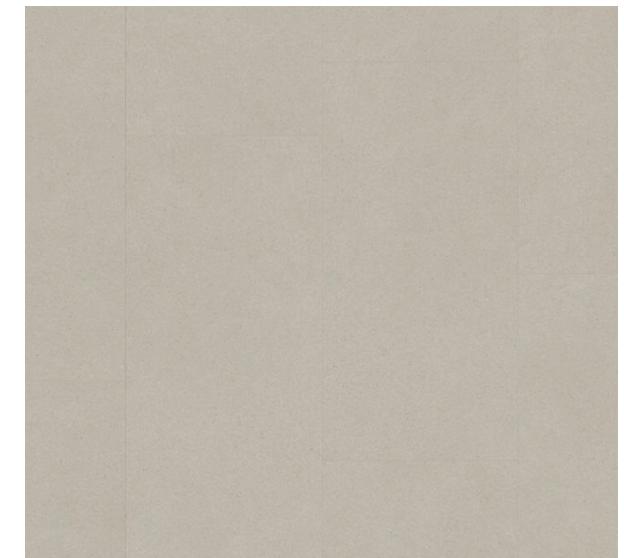

1300x320x4.5mm

QS-AMCL40137

Am - Click - Vibrant Sand

Quick-Step Livyn Ambient Click Vibrant Sand is crafted to emulate the appearance of genuine stone flooring, featuring intricate grain textures and striking patterns. The Livyn collection offers a soft feel and warmth, perfect for enhancing any room in the house. Vibrant Sand flooring boasts exceptional water resistance, compatibility with underfloor heating, and durability. Installation is effortless; simply float it over an underlay, and with the integrated click system, there's no requirement for hammers or tapping blocks, allowing for a swift and simple setup.

AMBIENT



1300x320x4.5mm

QS-AMCP40046

Am - Click Plus - Cream Travertin

Quick-Step Livyn Ambient Click Plus Cream Travertin is expertly designed to replicate the appearance of authentic natural stone, showcasing rich grain textures and elegant patterns. This Livyn collection not only offers a soft touch but also provides a cozy warmth underfoot, making it perfect for any area of your home. The Subtle Beige flooring is exceptionally water-resistant, compatible with underfloor heating, and built to withstand daily wear and tear. Installation is a breeze; you simply float it over an underlay, and thanks to the integrated click system, there's no need for hammers or tapping blocks, ensuring a fast and hassle-free setup.



LIVYN

AMBIENT



1300x320x4.5mm

QS-AMCP40034

Am - Click Plus - Grey Slate

Quick-Step Livyn Ambient Click Plus Grey Slate is expertly engineered to replicate the appearance of authentic natural stone flooring, showcasing intricate grain textures and elegant designs. This Livyn collection provides a comfortable, soft sensation underfoot while creating a warm atmosphere, making it perfect for every space in your home. The Grey Slate Stone flooring boasts impressive water resistance, is suitable for underfloor heating, and is designed to withstand the rigors of daily life.



AMBIENT



1300x320x4.5mm

QS-AMCP40047

Am - Click Plus - Light Grey Travertin

Experience the elegance of Quick-Step Livyn Ambient Click Plus Light Grey Travertin, beautifully crafted to mimic the look of natural stone with its intricate grain textures and patterns. This soft-to-the-touch, warm flooring is perfect for any room in your home. With exceptional water resistance, compatibility with underfloor heating, and durability, Light Grey Travertin combines practicality with style. This flooring can be easily installed by floating it over an underlay. Thanks to its built-in click system, there's no need for a hammer or tapping block, ensuring a quick and straightforward installation process.



LIVYN

AMBIENT



1300x320x4.5mm


QS-AMCP40035

Am - Click Plus - Black slate

Quick-Step Livyn Ambient Click Plus Black Slate mimics the appearance of natural stone with its rich grain textures and patterns. The Livyn collection is not only soft to the touch but also warm underfoot, making it perfect for any room in the house. This Black Slate flooring is exceptionally water-resistant, compatible with underfloor heating, and durable. It is installed by floating it over an underlay, and thanks to its integrated click system, there's no need for a hammer or tapping block, ensuring a fast and effortless installation process.



AMBIENT

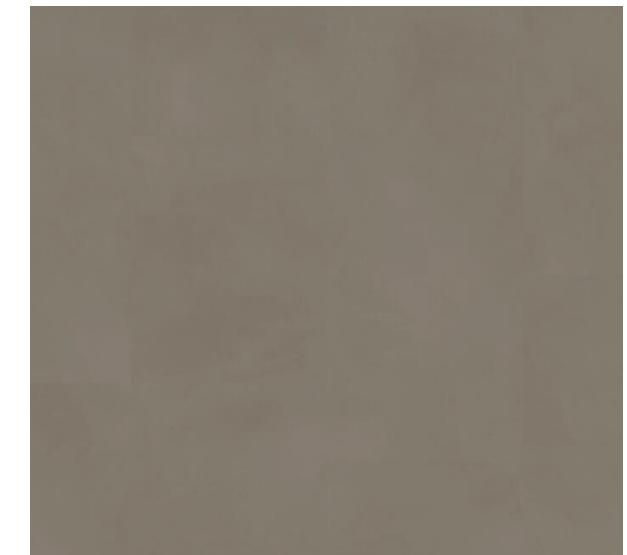

1300x320x4.5mm

QS-AMCP40141

Am - Click Plus - Minimal Taupe

Quick-Step Livyn Ambiant Click Plus Minimal Taupe beautifully emulates the look of natural stone with its intricate grain textures and patterns. Part of the Livyn collection, this flooring is soft to the touch and warm underfoot, making it a perfect choice for any room in your home. The Minimal Taupe flooring is exceptionally water-resistant and compatible with underfloor heating. It is designed for easy installation, floating over an underlay, and its built-in click system eliminates the need for a hammer or tapping block, ensuring a swift and hassle-free installation process.



LIVYN

AMBIENT




1300x320x4.5mm

QS-AMCP40049

Am - Light Concrete

Quick-Step Livyn Ambient Click Plus Light Concrete floors provide outstanding comfort and are truly enjoyable to walk on. They are both durable and visually appealing. The Quick-Step Livyn Ambient Light Concrete collection features stone-inspired designs, each with its own distinct character. These LVT floors are available in both Dryback (glue-down) and click formats. Our "Ambient" collection showcases a rich, tactile texture and stunning color variations.

AMBIENT

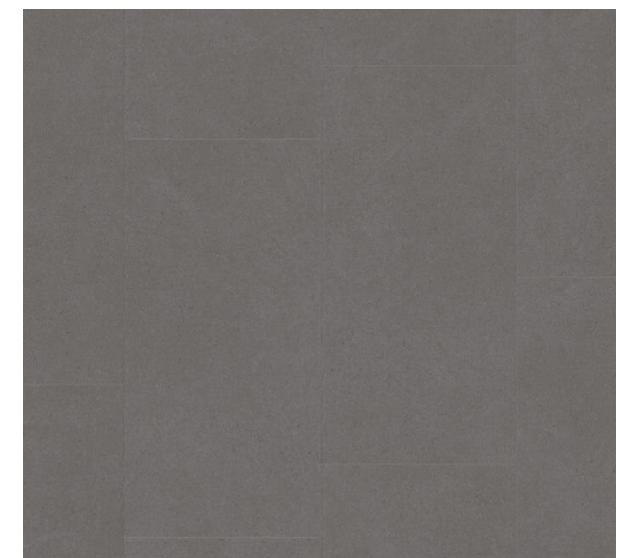

1300x320x4.5mm

QS-AMCP40138

Am -Click Plus -Vibrant Medium Grey

Quick-Step Livyn Ambient Click Plus in Vibrant Medium Grey captures the essence of natural stone with its rich grain textures and intricate patterns. The Livyn range not only provides a soft and inviting touch but also offers warmth underfoot, making it perfect for every room in your home. This flooring option is highly water-resistant and compatible with underfloor heating, enhancing its versatility. Installation is a breeze—simply float it over an underlay and utilize the integrated click system, eliminating the need for a hammer or tapping block and ensuring a quick and hassle-free setup.



AMBIENT



1300x320x4.5mm

QS-AMCP40136

Am-Click Plus-Marble Carrara White

The remarkable Quick-Step Livyn Ambiente Marble Carrara White is a stylish and hard-wearing floor. It has been constructed with high-performance in mind, benefitting from an ultra-strong core. Its surface protects against scratches and stains and it benefits from a 100% waterproof design. This means you can install it in any area of the home, including the bathroom.

One of the best features of this floor is that it is easy to install. It comes with an exclusive Uniclic system, allowing you to connect the floor by simply clicking it together.



LIVYN

AMBIENT



1300x320x4.5mm

QS-AMCL40034

Am - Click Plus - Click Grey Slate

Quick-Step Livyn Ambient Click Plus - Click Grey Slate is crafted to emulate the elegance of natural stone, featuring deep grain textures and intricate patterns. The Livyn range offers a soft touch and warmth underfoot, making it a perfect choice for any area of your home. The Click Grey Slate flooring is highly water-resistant and compatible with underfloor heating. Its installation is straightforward—simply float it over an underlay, and with the built-in click system, there's no need for a hammer or tapping block, ensuring a quick and effortless setup.

AMBIENT

Ambient Click (+) 320 x 1300 x 4.5 mm 1 box = 5 planks = 2,080 m²

Ambient glue + 327 x 1305 x 25 mm 1 box = 9 planks = 3.841 m²

uniclic
multifit
ENTERTECHNIK

FACTORY WARRANTY		AMBIENT CLICK	AMBIENT CLICK +	AMBIENT GLUE +
Usage class	EN 16511:2014	Class 32		
	ISO 10582		Class 33	Class 33
CE / UKCA	EN 14041:2004 / AC:2006	DOP: end label on pack	DOP: end label on pack	DOP: end label on pack
Warranty	Residential use	20 years	25 years	25 years
(See installation instructions)	Commercial use	0 years - on request up to 10 years	5 years - on request up to 15 years	5 years - on request up to 15 years
GENERAL DATA				
Wear resistance	EN 13329 Annex E	≥ 1200 cycles	≥ 2000 cycles	≥ 2000 cycles
Impact resistance	EN 13329 Annex F	1800 mm	1800 mm	1800 mm
Scratch resistance	EN 16094	MSR-A1	MSR-A1	MSR-A1
		MSR-B2	MSR-B2	MSR-B2
Castor chairs	EN 425 - 25000 cycles	No delamination, no disturbance	No delamination, no disturbance	No delamination, no disturbance
Displacement of furniture feet	EN 424 - Foot 0.1 mm / 32 kg	No visible damage	No visible damage	No visible damage
Residual indentation	EN ISO 24343-1	0,05 mm	0,05 mm	0,05 mm
Resistance against staining	EN 438-2 - Acetone - Coffee - NaOH - H2O2 - Shoe Polish	Grade 5, no change	Grade 5, no change	Grade 5, no change
Swelling	ISO 24336	No swelling	No swelling	No swelling
Locking strength	ISO 24334 - Fmax long side	2.0 kN/m	2.0 kN/m	
	ISO 24334 - Fmax short side	2.5 kN/m	2.5 kN/m	
Dimensional stability	ISO 23999 - 6 hrs at 80°C	< 10,10%	< 10,10%	< 10,10%
	ISO 23999 - Cupping	< 1 mm	< 1 mm	< 2 mm
Fire classification	EN 13501-1	Bfl-s1	Bfl-s1	Bfl-s1
UV resistance	ISO 105 B02 - Blue reference	Class 8	Class 8	Class 8
Slip resistance	EN 13893	DS	DS	DS
DIN 51130:2014 / XP P05-011		R10 / PC10	R10 / PC10	R10 / PC10
With Shoes				
DIN 51097:1992 / XP P05-011				
Barefoot		Class B / PN18	Class B / PN18	Class B / PN18
BS7976-2:2002+A1:2013				
- Wet		PTV value ≥ 42 Low slip potential	PTV value ≥ 42 Low slip potential	PTV value ≥ 42 Low slip potential
- Dry		PTV value ≥ 60 Low slip potential	PTV value ≥ 60 Low slip potential	PTV value ≥ 60 Low slip potential
ENV 12633:2003 - Annex A		Class 2	Class 2	Class 2
Thermal resistance	EN 12667			
- Without Quick-Step underlay		0,020 m ² K/W	0,020 m ² K/W	0,015 m ² K/W
- On a Quick-Step COMFORT underlay		0,040 m ² K/W	0,040 m ² K/W	
- On a Quick-Step TRANSIT underlay		0,065 m ² K/W	0,065 m ² K/W	
- On a Quick-Step HEAT underlay		0,030 m ² K/W	0,030 m ² K/W	
Floor heating		Appropriate for all standard heating systems IN cement flooring. Limited application with heating films and alternatives. Max contact temp ≤ 27°C. See separate installation instructions.		
ENVIRONMENT & CERTIFICATES				
Floorscore				SCS-FS-05158
Formaldehyde emission	EN 14041:2004 / AC:2006	No added formaldehyde in production		< detection limit
TVOC 28 days	ISO 16000 part 9-6	AgBB requirement after 28 days <1000 µg/m ³		NOT present
Content	Heavy metals+ lead/cadmium			< 20 µg/m ³
DANGEROUS SUBSTANCES	Carcinogenic, mutagenic or reprotoxic substances class 1A and 1B (candidate list)			NOT present
REACH	Regulation (EC) Nr 1907/2006			NOT present
Plasticizer	Ortho-phthalate free plasticizer			Compliant
Recycled content	Only INTERNAL recycled material used			

EN14641:2004/

EN14041:2004,

87

EN15



AMBIENT CLIMATE

AMBIENT CLICK AMBIENT GLUE

EN14041:2004/
AMBIENT C
AMBIENT C
AMBIENT G

EN15102:2007/A1:2011



LIVYN | AMBIENT



Quick-Step® is a quality product produced by UNILIN bvba – division Flooring, Ooigemstraat 3, B-8710 Wielbeke, Belgium, Europe. Product images may differ from actual product. The availability of products, or the products themselves, may change at any time without notice. Content © 2024-2025 by UNILIN bvba – division Flooring. All rights reserved. The contents of this brochure may not be reproduced in whole or in part without prior written permission from the publisher. 019 115 01 - Z4B - EN.

Coverphoto: SIG4754

FOLLOW US ON

www.facebook.com/QuickStepFloors

www.youtube.com/quickstepfloor

www.pinterest.com/quickstepfloor

@QuickStepFloor

EXCLUSIVE DISTRIBUTOR:

FLOORWORLD™
THE BIGGEST FLOORING COMPANY IN THE MIDDLE EAST