


SIGNATURE
COLLECTIONS

NYLON COMMERCIAL CARPET TILES

AUTUMN



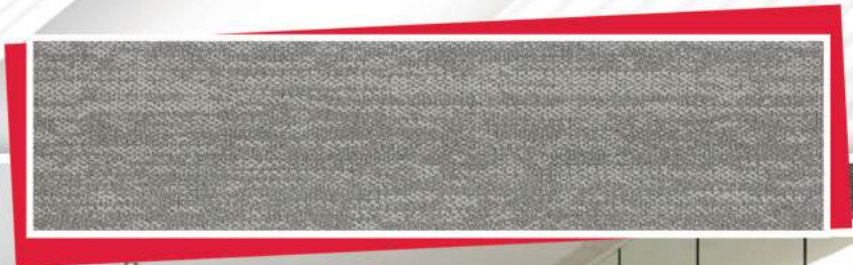

BCM-SIG-AUT-03
BCM-SIG-AUT-06




BCM-SIG-AUT-04
BCM-SIG-AUT-05
BCM-SIG-AUT-07

Product: Autumn - 04
Code: BCM-SIG-AUT-04


100cm

25cm

PLANK

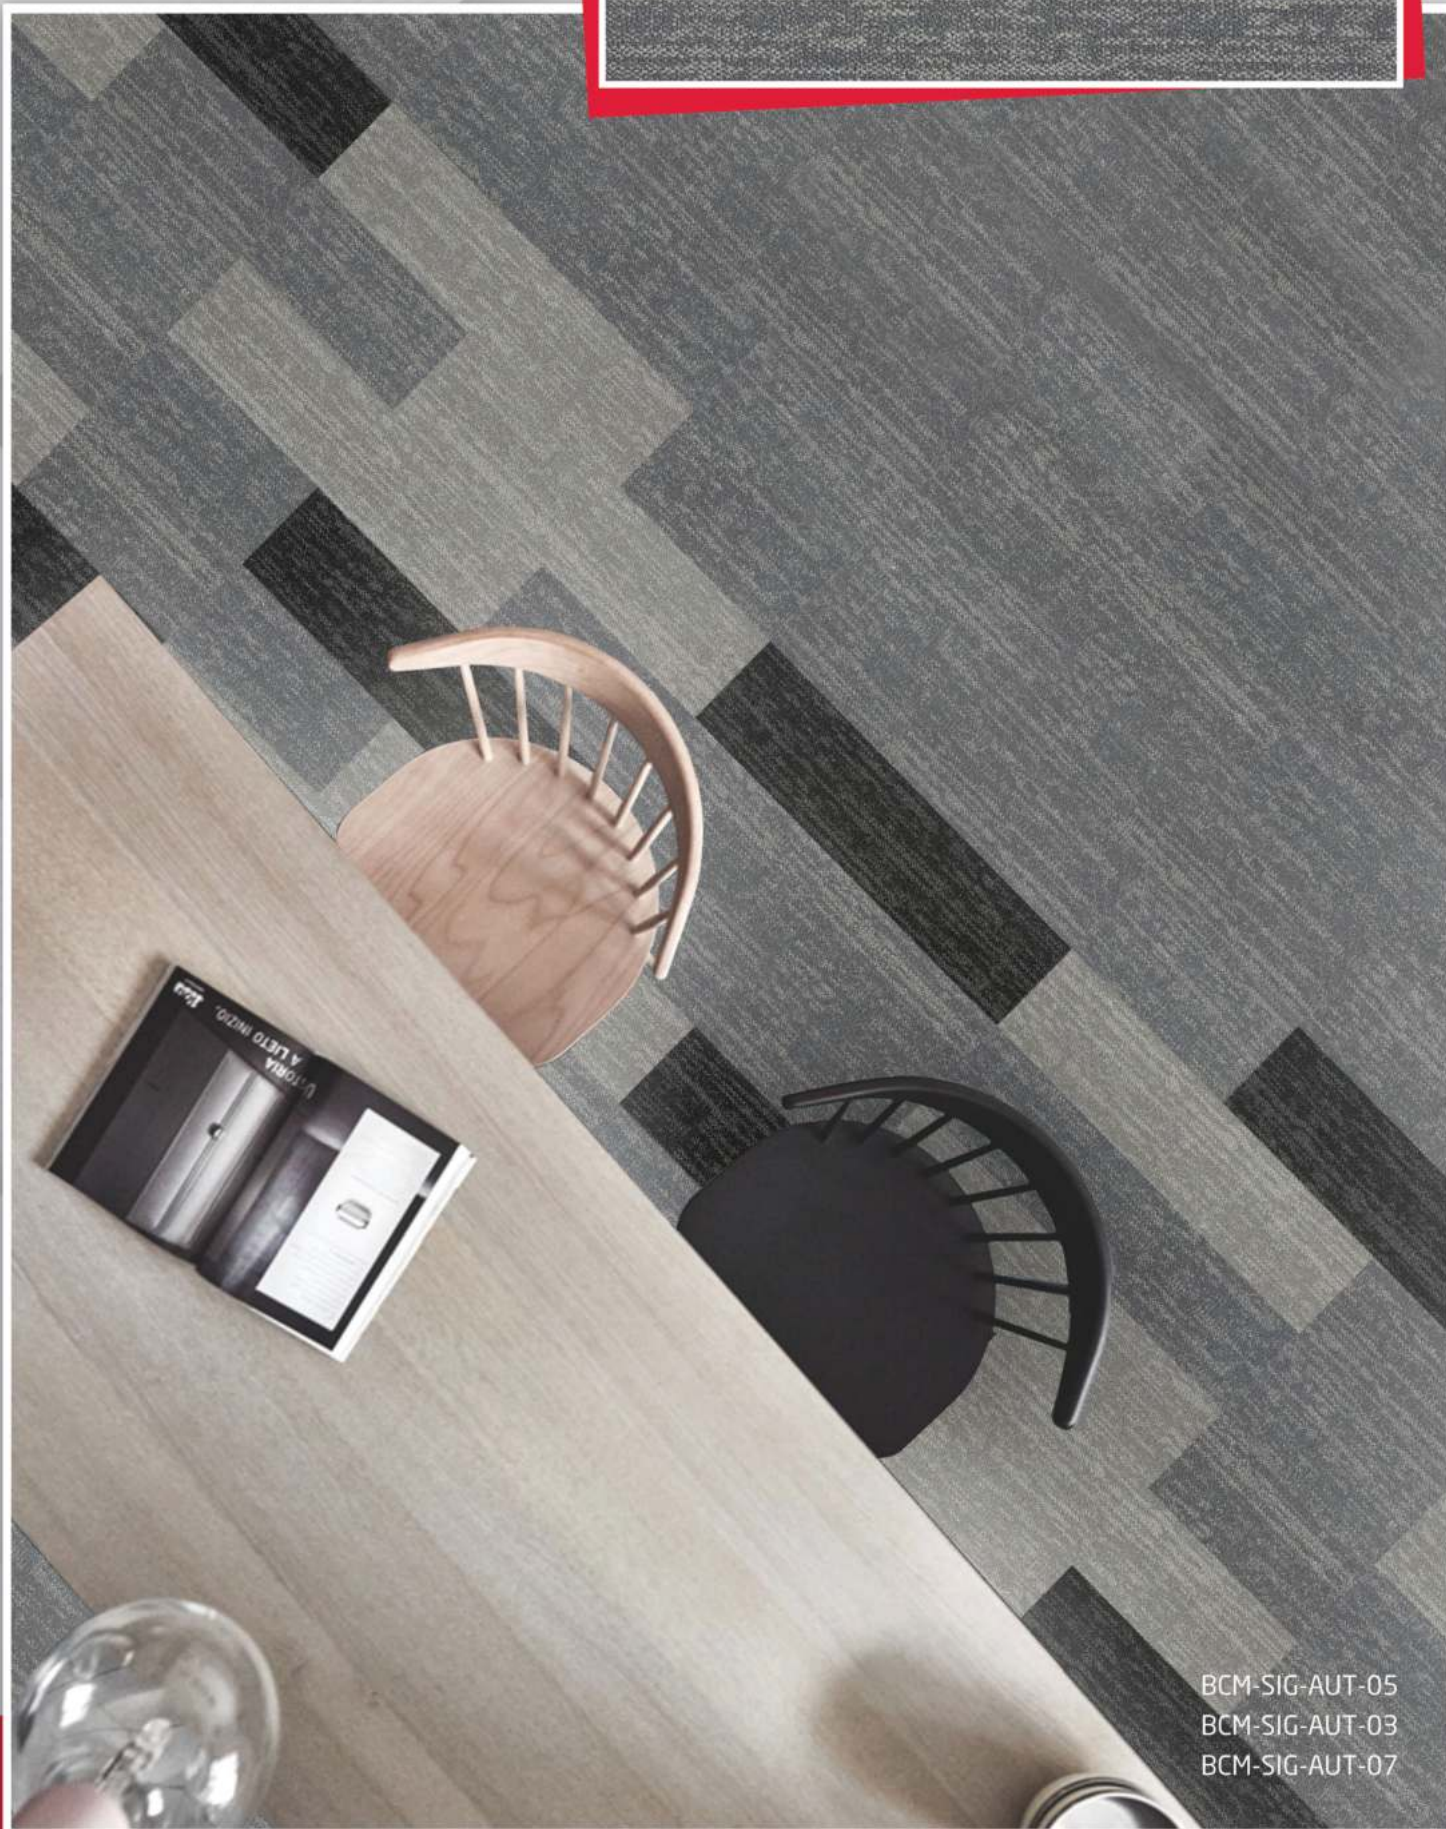

BCM-SIG-AUT-05
BCM-SIG-AUT-03
BCM-SIG-AUT-07

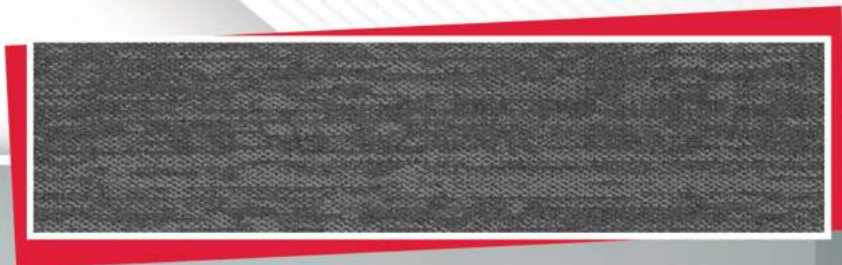


BCM-SIG-AUT-06
BCM-SIG-AUT-05

Product: Autumn - 06
Code: BCM-SIG-AUT-06


100cm

25cm

PLANK

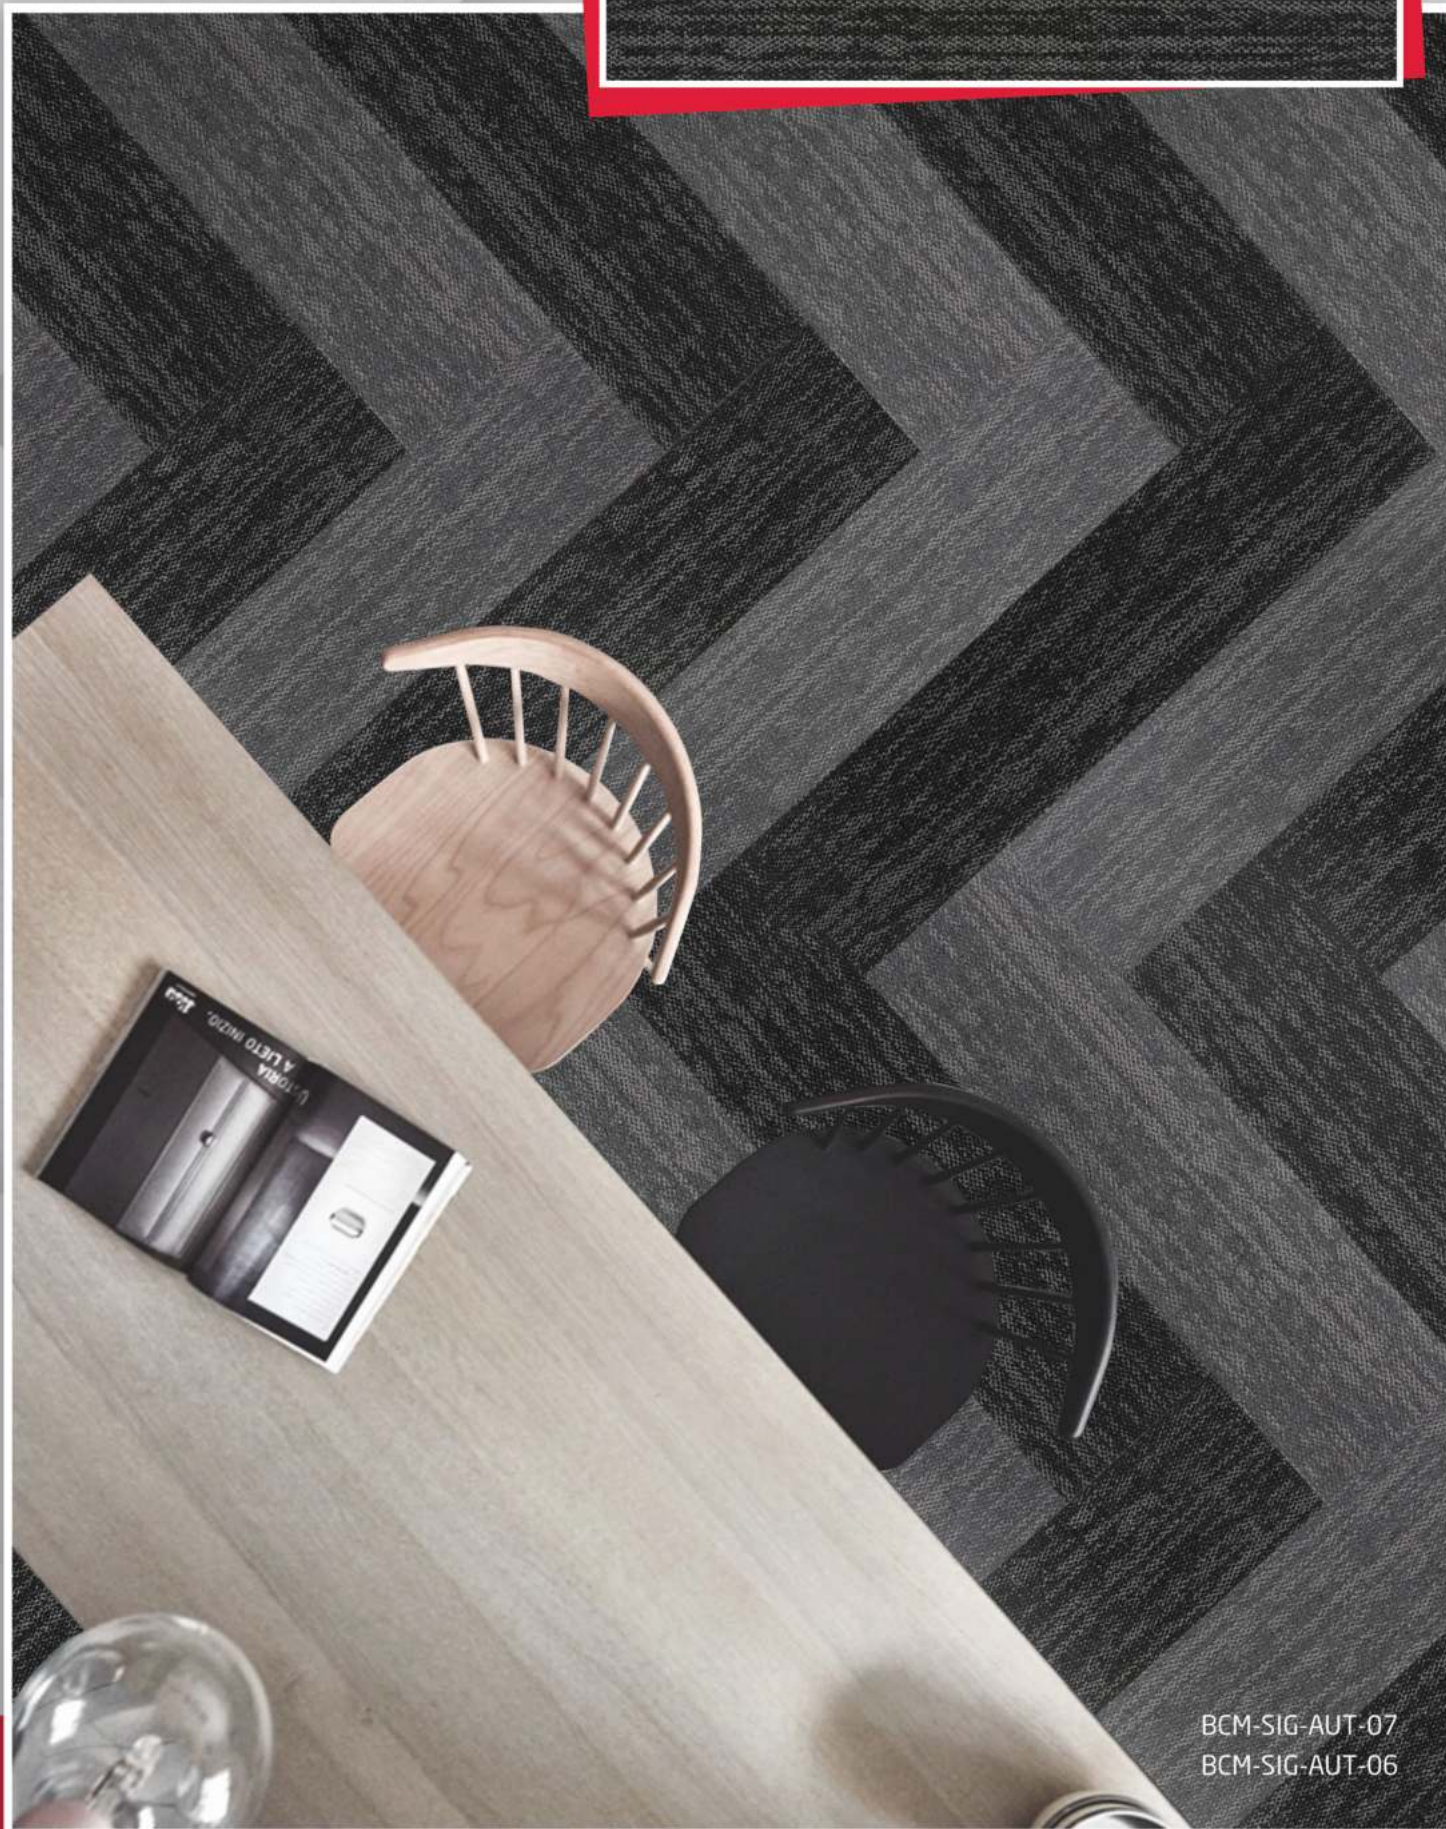

BCM-SIG-AUT-07
BCM-SIG-AUT-06

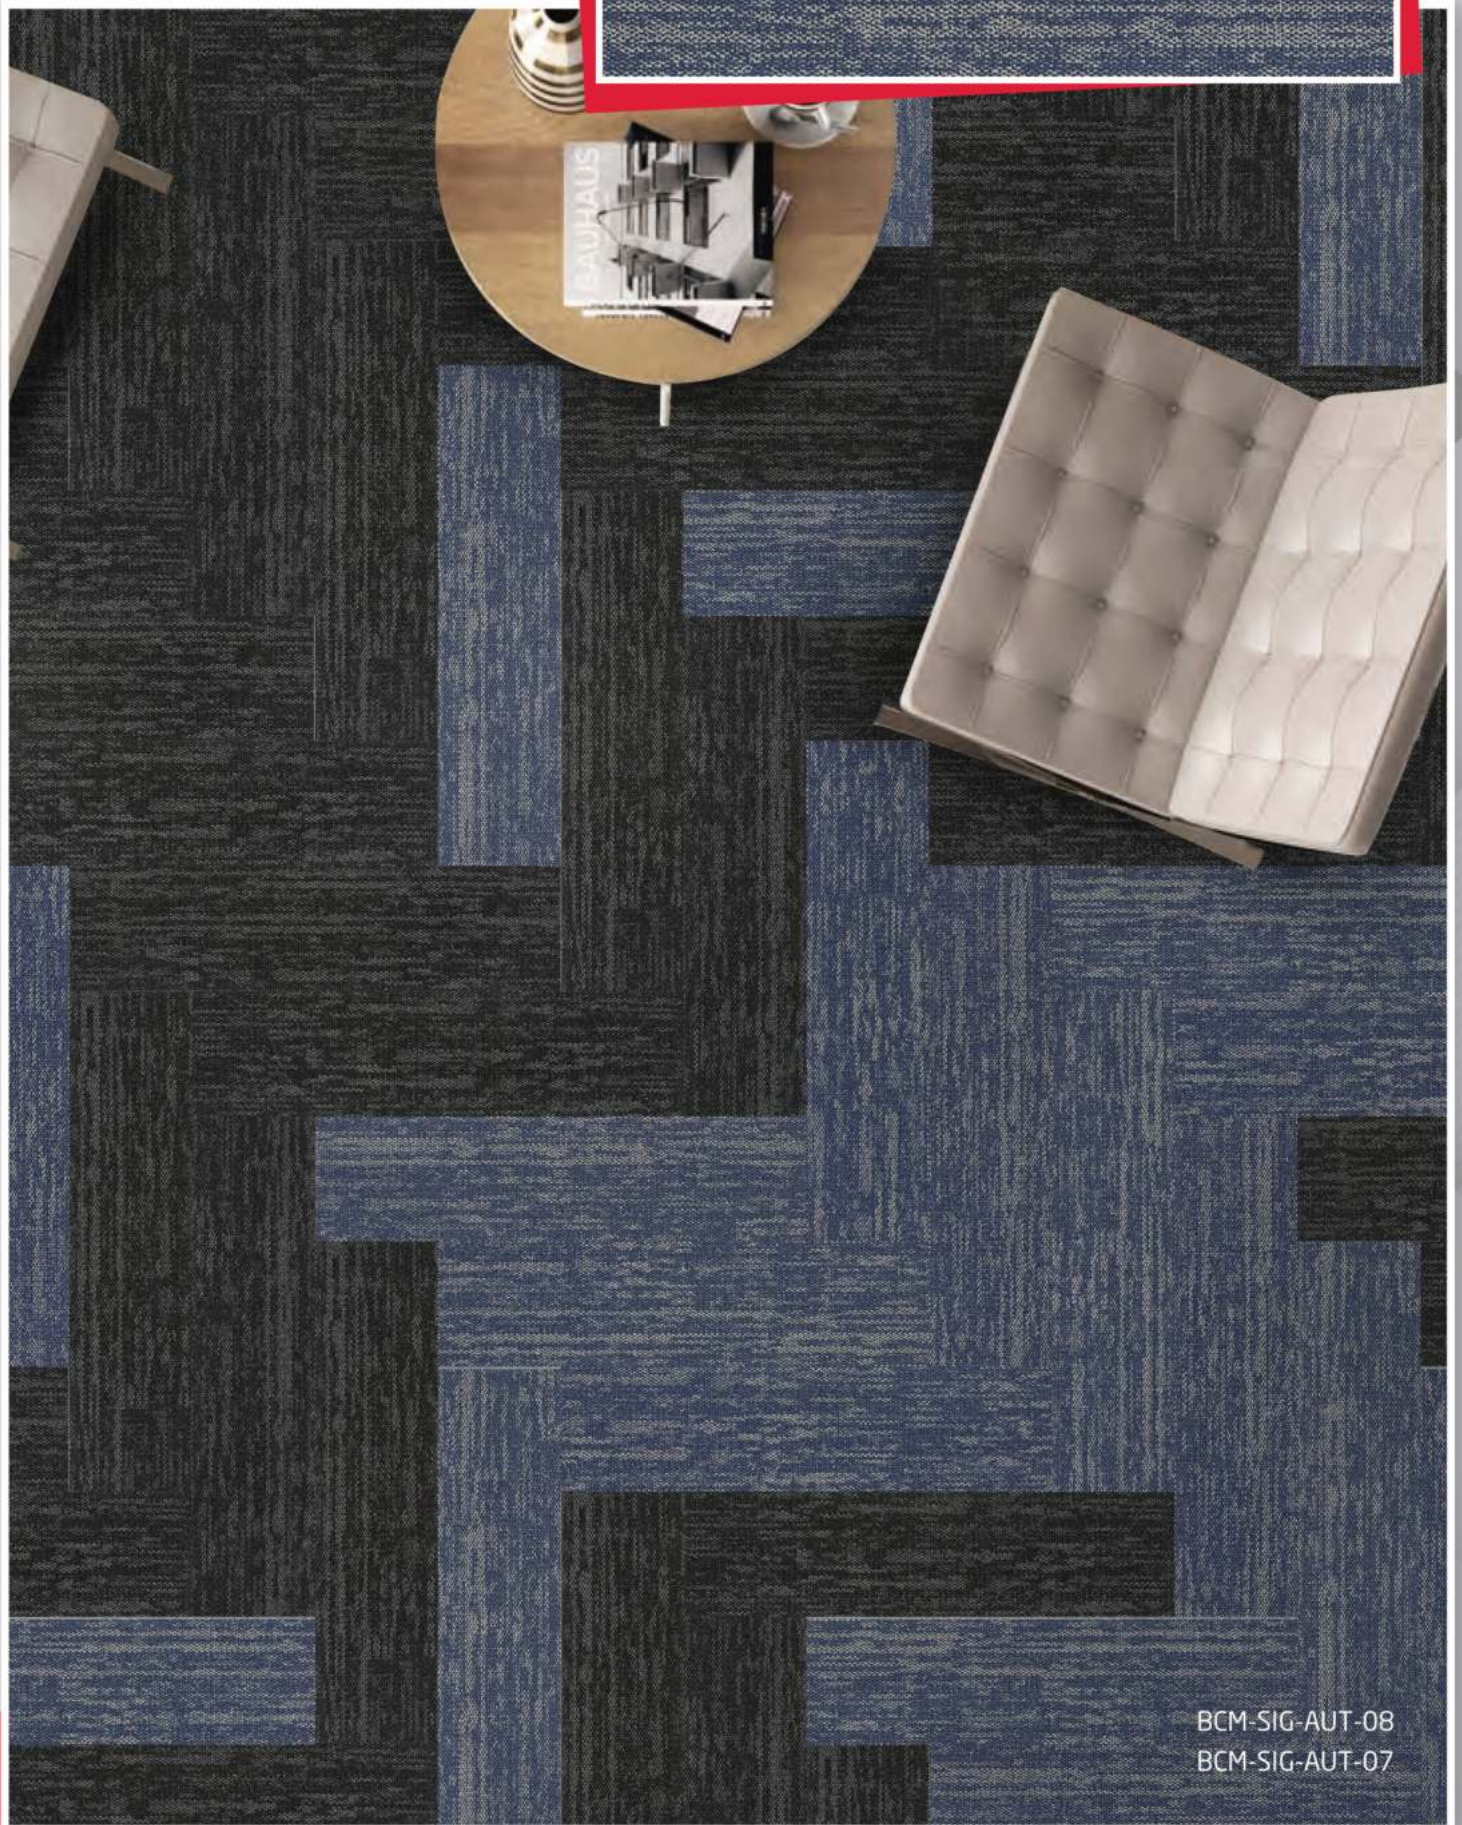

BCM-SIG-AUT-08
BCM-SIG-AUT-07

Product: Autumn - 08
Code: BCM-SIG-AUT-08

100cm

25cm

PLANK

AUTUMN - TDS

SIGNATURE
COLLECTIONS
NYLON COMMERCIAL CARPET TILES

SPECIFICATIONS

Description	Nylon Carpet Tile
Construction	Tufted Textured Loop
Face Fiber	100% Nylon BCF Solution-dyed
Pile Height	4+/-0.3mm
Total Height	6.5+/-0.3mm
Pile Weight	450+/-5%g/m2
Gauge	1/12"
Primary Backing Cloth	Non-woven Polyester Spunbonded
Backing	PVC with Glass Fiber
Size	25x100cm



PLANK

TESTING

CRI Green Label Plus		GLP1879
Colorfastness to Light	AATCC 16-03	Rating 5.0
Colorfastness to Water	AATCC 107-02	Rating 5.0
Colorfastness to Cleaning	AATCC 138-00	Rating 5.0
Colorfastness to Crocking	AATCC 165-99	Rating 5.0
Stain Resistance	AATCC 175-03	Rating 10
Compression force deflection	ASTM D 3574	80.7 Lbs/inch2
Smoke density (flaming)	ASTM E 662	102
Smoke density (non-flaming)	ASTM E 662	424
Loose laid	BS 4790-1987	Low Radius
Edge Ravel	ASTM D 7267	0.5 Lbs
Surface Flammability	ASTM D 2859	DOC FF 1-70
Radiant Flux	ASTM E 648	Class I
Tuft bind	ASTM D 1335	10.6Lbs
AACHEN dimensional stability	ASTM D 7570	MT4: 0.091% CT4:0.008%
Electrostatic propensityAATCC 134		0.5kv
Accelerated soilin	ASTM D 6540	Rating 5.0

PERFORMANCE

Wear Classification	Heavy commercial
Wear Warranty	10 Years

