

BEYOND
FLOORING



COMMERCIAL

PRODUCT CATALOGUE

2022-23 EDITION

HETEROGENEOUS VINYL

“

We offer top-quality products,
impeccable service,
innovative, sustainable production
and a proven track record...

But most of all,
we love helping to
achieve your goals.”




COMMERCIAL

About IVC Commercial

IVC Commercial is a global player in the design and manufacture of flooring solutions including Carpet Tiles, Luxury Vinyl Tiles (LVT) and Heterogeneous Vinyl for use in business, public and private environments.

As the commercial division of IVC Group, we're focused on improving the productivity and wellbeing of users in spaces through innovative solutions that are easy to implement and affordable. Accountable for our actions, we design and make floors responsibly in Europe, developing a circular approach to the future of flooring.

IVC Group is part of Mohawk Industries Inc., the world's largest flooring company. With 1,500 employees and 7 production sites in Europe and Russia, IVC Group produces over 130,000,000m² of flooring every year.

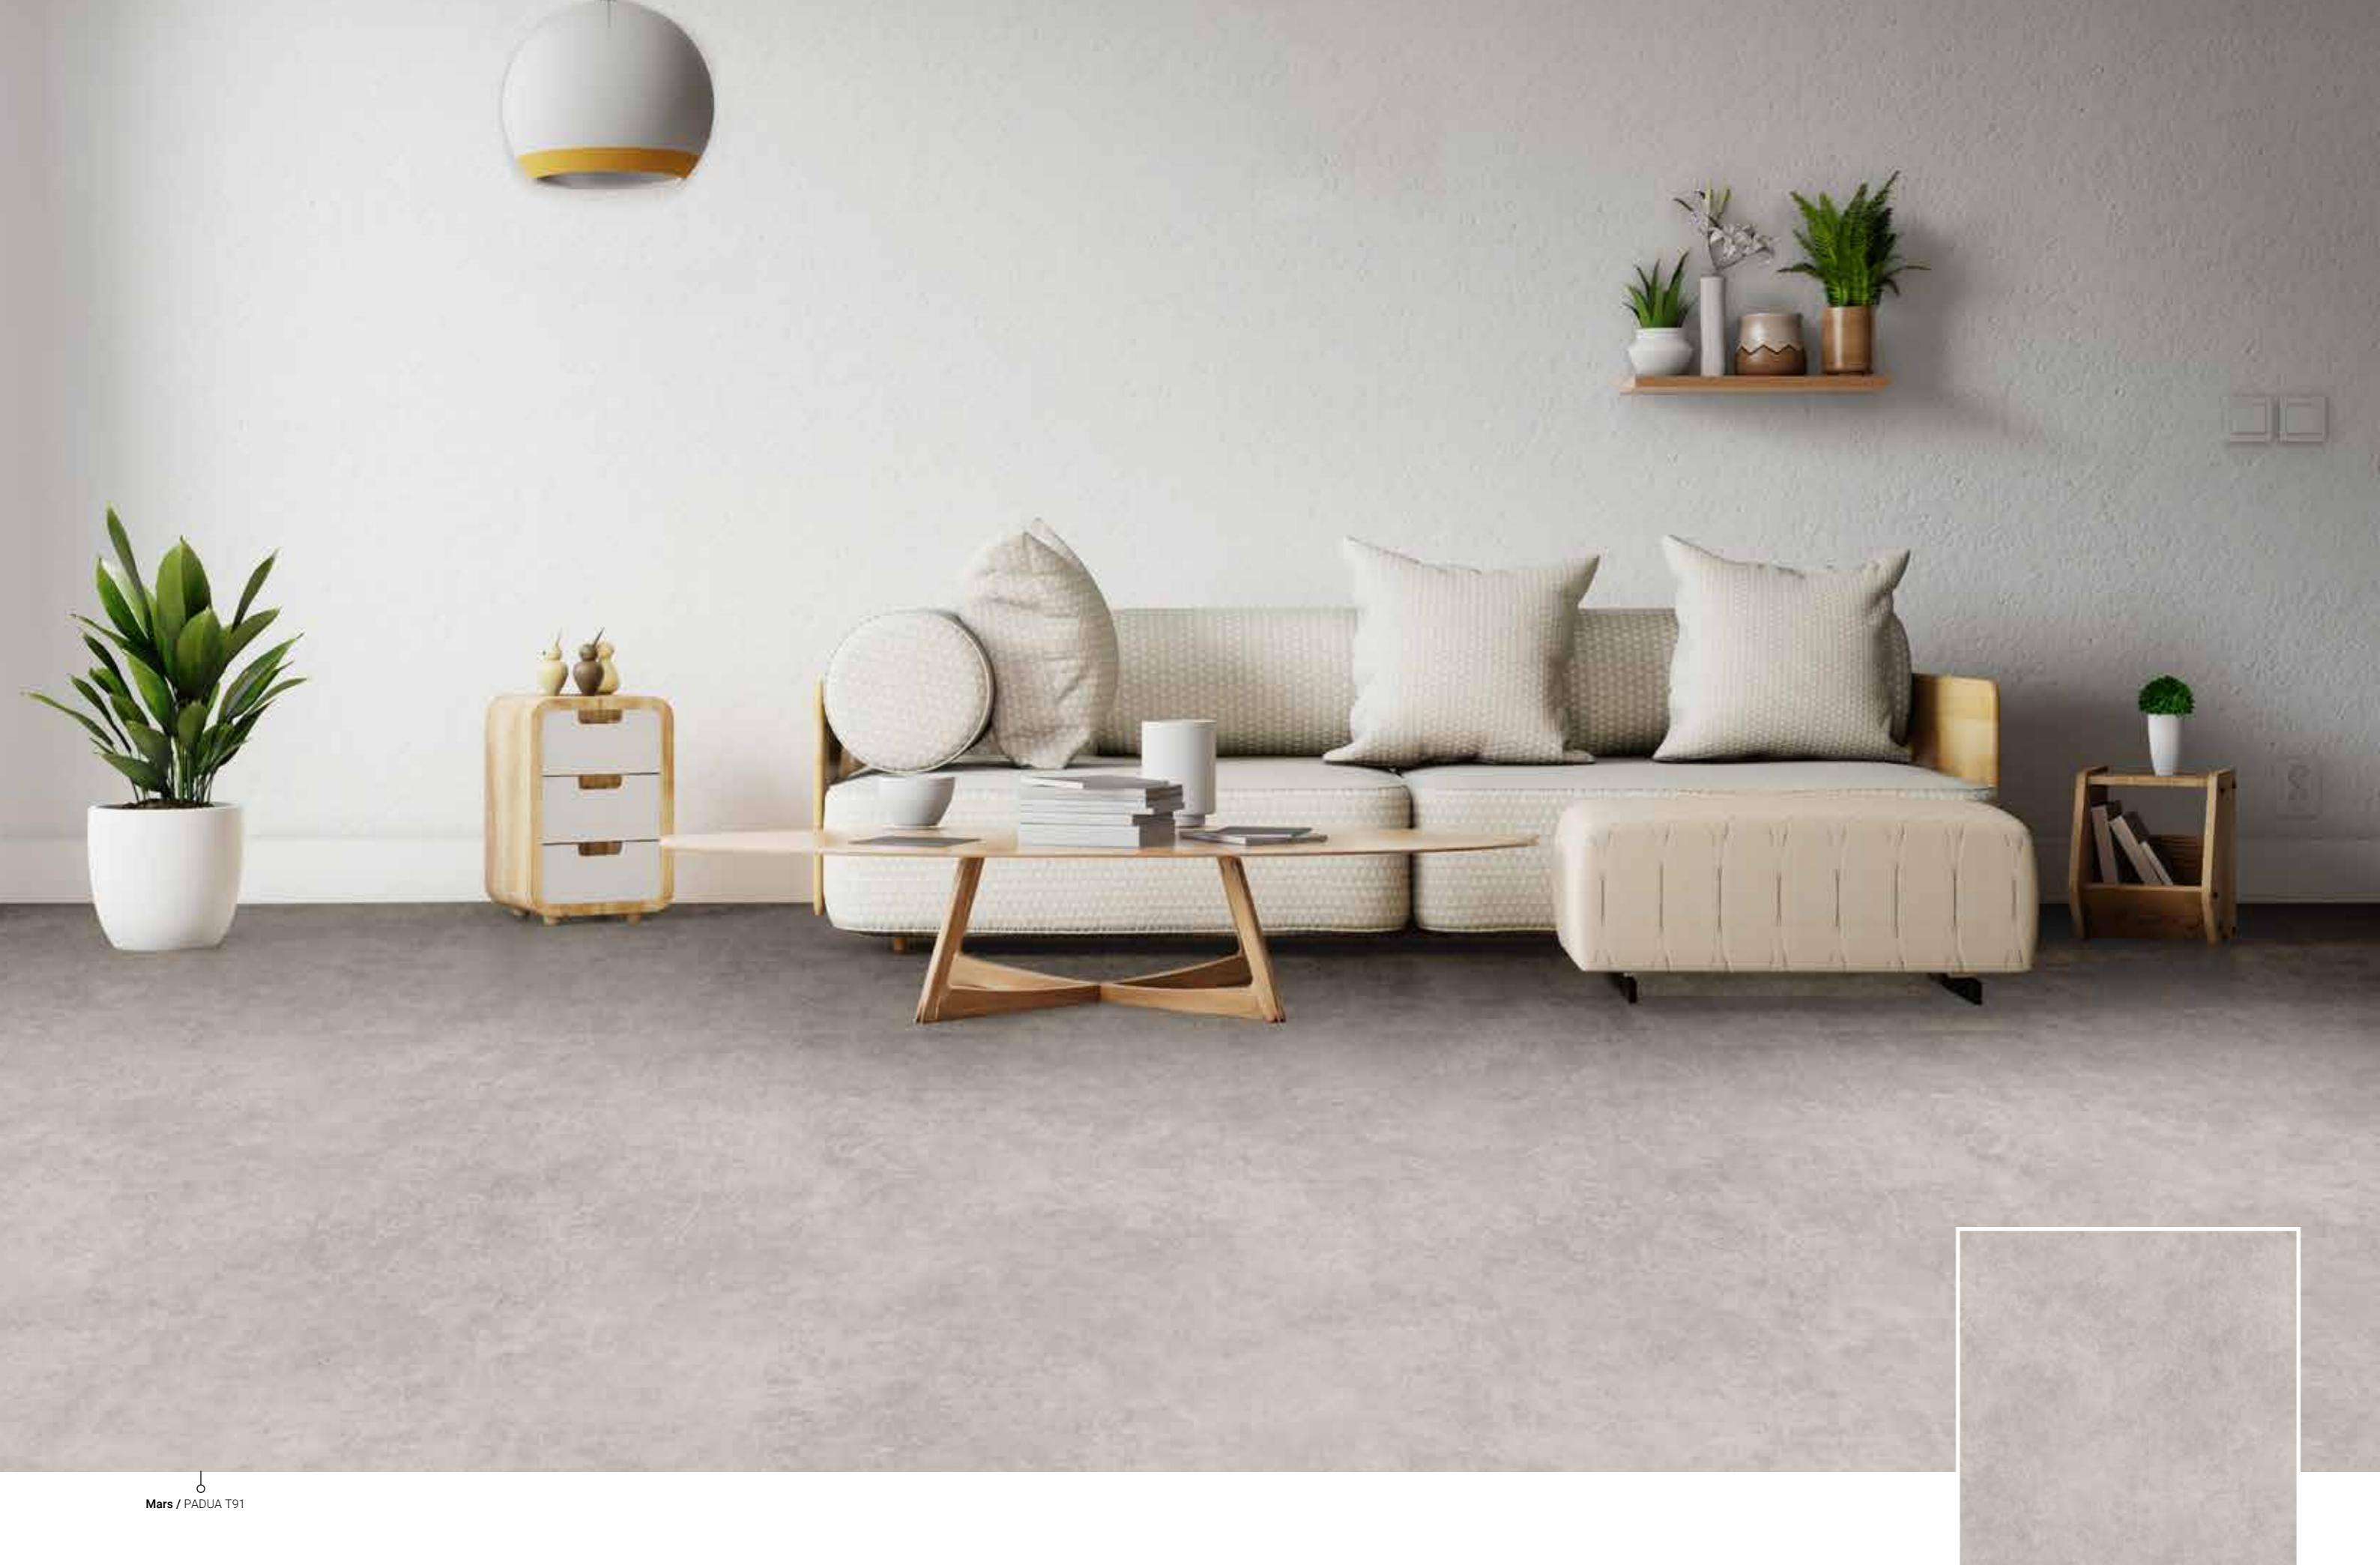

Mars / PADUA T91



Heterogeneous Vinyl

The Collection

CENTRA	08
MARS	08
SILENTO 50	08
ACCESSORIES	08
ADHESIVES	08
WELDING	08
SKIRTINGS ENTRANCE MATS	08

BEYOND
FLOORING


Mars Collection




BOTTICELLI T93




MUSIC 675

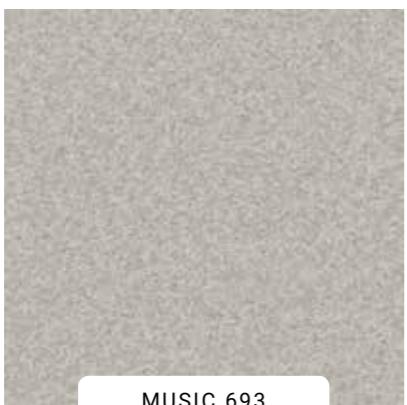


MUSIC 693

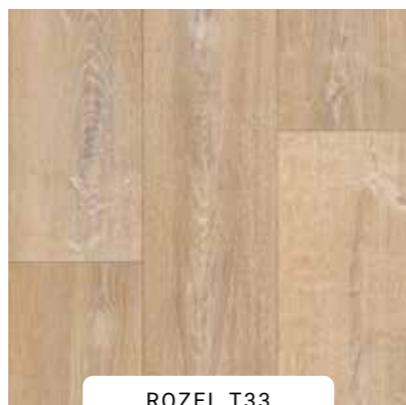

ROZEL T33

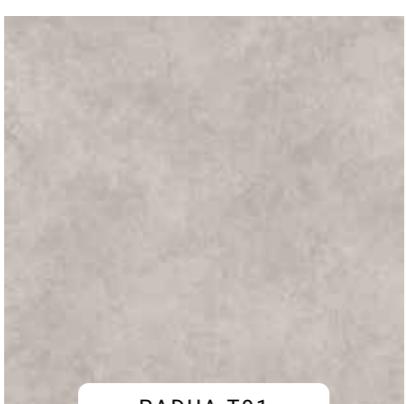

PADUA T91

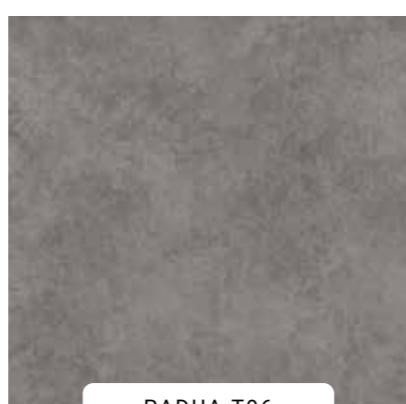

PADUA T96

Mars


Technical Specifications

Level of use / Classe d'usage - Eignungsklasse - Gebruiksklasse	EN ISO 10874	33 - 42
Total thickness / Epaisseur totale - Gesamtdicke - Totale dikte	EN ISO 24346	2,30 mm
Wear layer / Couche d'usure - Nutzschicht - Slijlaag	EN ISO 24340	0,60 mm
Wear layer PUR treatment / Traitement polyuréthane - Schutz vor Schmutz PUR - PUR slijlaag behandeling	HyperGuard+	
Total weight/m² / Poids total/m ² - Gewicht/m ² - Totaal gewicht/m ²	EN ISO 23997	ca. 2.200 g
Heterogeneous PVC / PVC hétérogène - Heterogene PVC - Heterogene PVC	EN ISO 10582	
Width / Largeur - Breite - Breedte	EN ISO 24341	2-3-4 m
Standard Length / Longueur standard - Standardlänge - Standaardlengte	EN ISO 24341	ca. 30 m
Weight of standard roll / Poids standard des rouleaux - Standard-Rollengewicht - Standaard rolgewicht		134-200-268 kg
Inflammability / Classement feu - Brandverhalten - Brandklasse	EN 13501	Bfl-S1
Slip resistance / Glissance - Rutschfest - Antislip	EN 13893	DS
Slip restraint / Résistance au glissement - Rutschhemmung - Slipweerstand	DIN 51130	R10
Residual indentation / Poinçonnement rémanent - Eindrückverhalten - Restindruk	EN ISO 24343-1	norm ≤ 0,10 mm
Furniture leg resistance / Résistance au pied de meuble - Möbelshubtest - Meubelpoottest	EN ISO 16581	Very good
Curling / Incursion - Schüsselung - Krulling	EN ISO 23999	≤ 8 mm
Electrical resistance / Résistance électrique - Elektrischer Widerstand - Elektrische weerstand	EN ISO 10965	10 ⁹ Ohm
Static electrical propensity / Accumulation de charges électrostatiques - Elektrostatische Verhaltung - Electrostatica Propensiteit	EN 1815	≤ 2kV (antistatic)
Dimensional stability / Stabilité dimensionnelle - Massänderung - Dimensionele stabiliteit	EN ISO 23999	<0,10% (norm ≤ 0,40%)
Thermal conductivity / Conductivité thermique - Wärmeleitfähigkeit - Warmteleergangscoëfficiënt	EN ISO 10456	0,25 W/(m.K)
Heat insulation / Isolation thermique - Wärmedurchlasswiderstand - Thermische isolatie	EN ISO 12664	0,0108 (m ² .K/W)
Abrasion group / Groupe d'abrasion - Verschleißverhalten - Slijtageweerstand	ISO 10582	Type I
Indoor air quality / Qualité de l'air intérieur - Raumluftqualität - Binnenmilieu		LOW VOC
Acoustic insulation / Efficacité acoustique - Tritschallverbesserungsmaß - Kontaktgeluidisolatie	EN ISO 717-2	ΔLw 13 dB
Castor chair resistance / Résistance aux chaises à roulettes - Stuhrollenfestigkeit - Bestand tegen stoelwielen	EN ISO 4918	Very good
Castor type / Type de chaises à roulettes - Stuhlrolle Typ - Type stoelwielen	EN 12529	Type W
Light fastness / Résistance à la lumière - Lichtechtheit - Lichtechniek	ISO 105B02	6-7
Underfloor heating / Chauffage par le sol - Bodenheizung - Vloerverwarming	EN 12524	Suitable
Resistance to chemicals / Résistance aux produits chimiques - Chemikalienbeständigkeit - Chemicalenresistentie	EN ISO 26987	Very good
Hot welding / Soudage thermique - Thermische Verschweißung - Warmlassen		Available
Cold welding / Soudage à froid - Kaltverschweißung - Koud lassen	Invisiweld	Suitable
Warranty years / Garantie ans - Garantie Jahren - Garantie in jaren		5

The warranty covers manufacturing defects and premature wear in the event of normal use | La garantie couvre les vices de fabrication et l'usure précoce en usage normal
Die Garantie deckt Herstellungsfehler und vorzeitigen Verschleiß bei normaler Nutzung | De garantie dekt fabricagefouten en voortijdig afslijken bij normaal gebruik

IVC reserves the right to change or amend any written information without notice.
Ensure the latest information is being consulted by referring to the website.



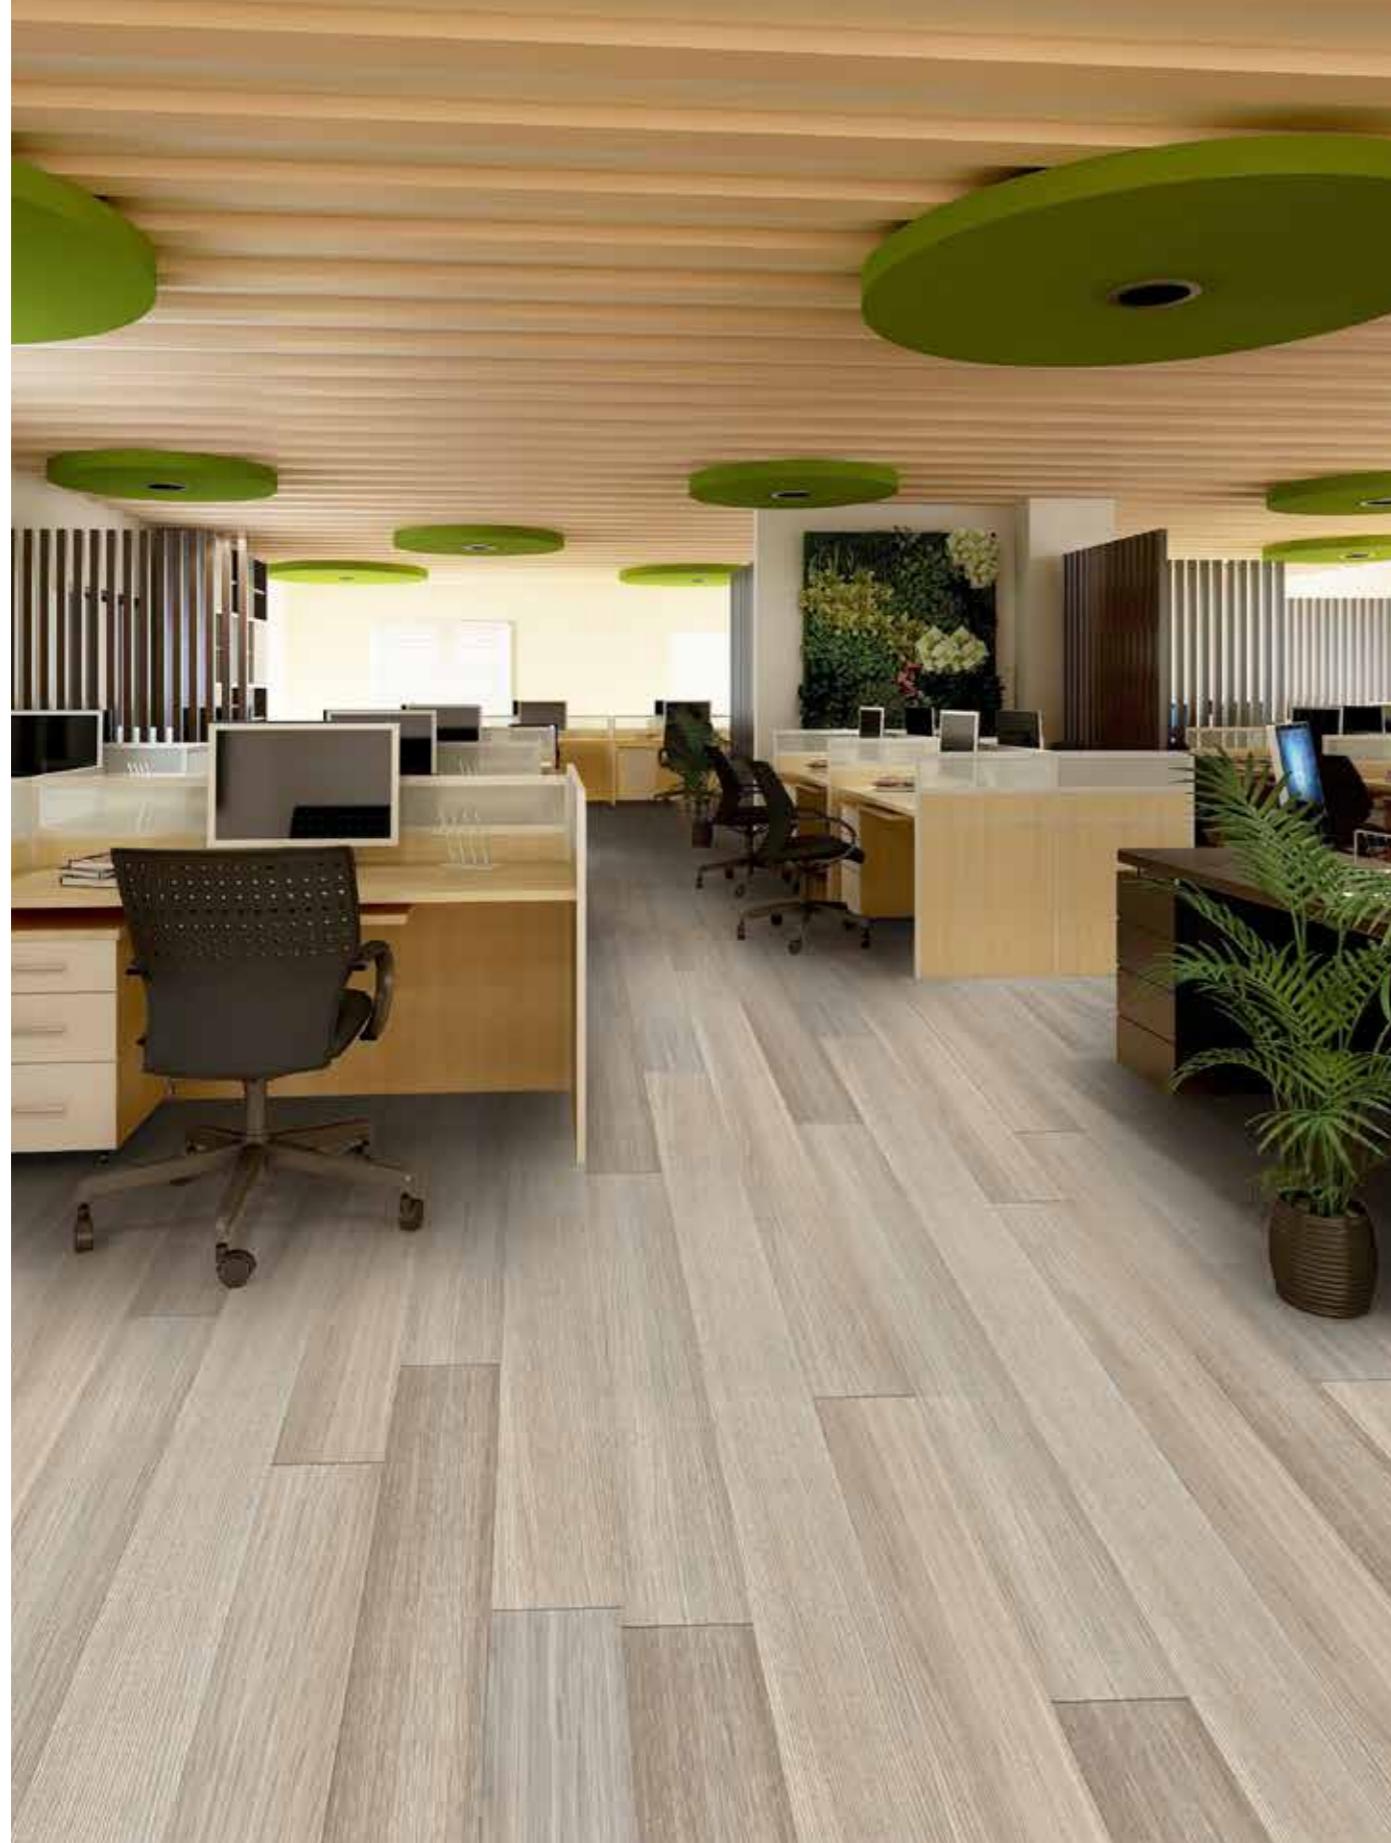

IVC Commercial - Heterogeneous Sheet Vinyl - Compact / Mars




Botticelli - T93

MANUFACTURER	IVC Commercial
COLOUR TONE	Brown
FINISH	Matt
RANGE	IVC-Mars
STYLE	Roll
THICKNESS	2.5mm
EFFECT	Wood Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	IVC Commercial - Heterogeneous Sheet Vinyl - Compact - 2.3mm/ 0.60mm wear layer - R10 - WR 409 - 2m x 30m Rolls
WATERPROOF	Yes



IVC Commercial - Heterogeneous Sheet Vinyl - Compact / Mars

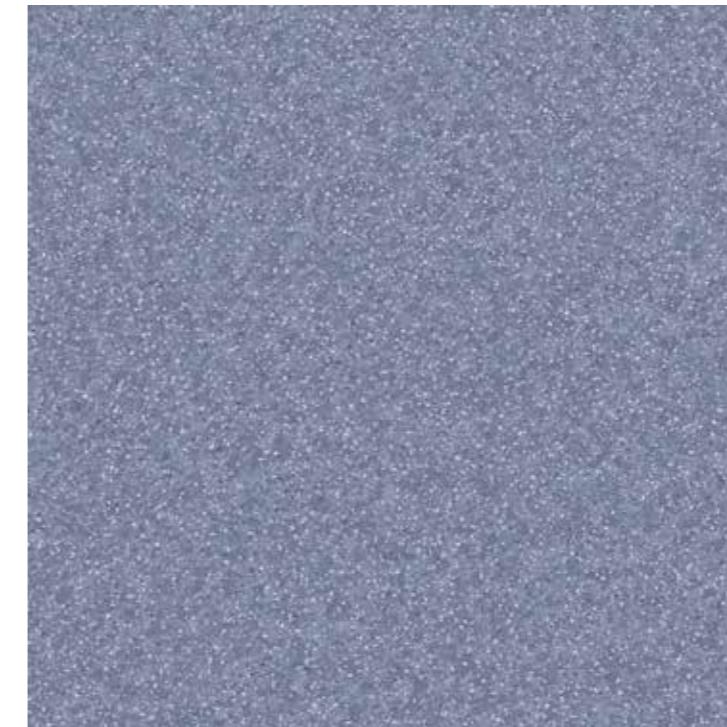


Music 675

MANUFACTURER	IVC Commercial
COLOUR TONE	Blue
FINISH	Matt
RANGE	IVC-Mars
STYLE	Roll
THICKNESS	2.5mm
EFFECT	Concrete Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	IVC Commercial - Heterogeneous Sheet Vinyl - Compact - 2.3mm/ 0.60mm wear layer - R10 - WR 479 - 2m x 30m Rolls
WATERPROOF	Yes




IVC Commercial - Heterogeneous Sheet Vinyl - Compact / Mars

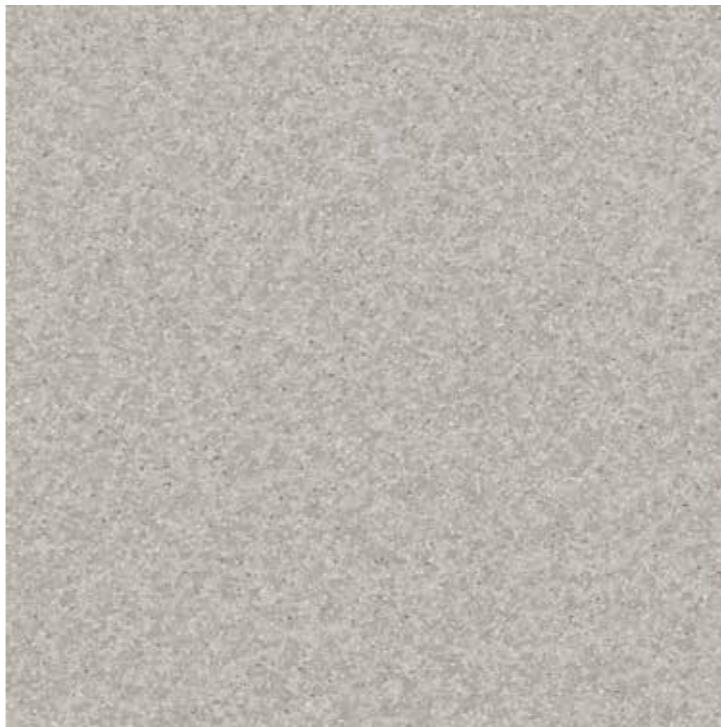


Music 693

MANUFACTURER	IVC Commercial
COLOUR TONE	Grey
FINISH	Matt
RANGE	IVC-Mars
STYLE	Roll
THICKNESS	2.5mm
EFFECT	Concrete Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	VC Commercial - Heterogeneous Sheet Vinyl - Compact - 2.3mm/ 0.60mm wear layer - R10 - WR 409 - 2m x 30m Rolls
WATERPROOF	Yes

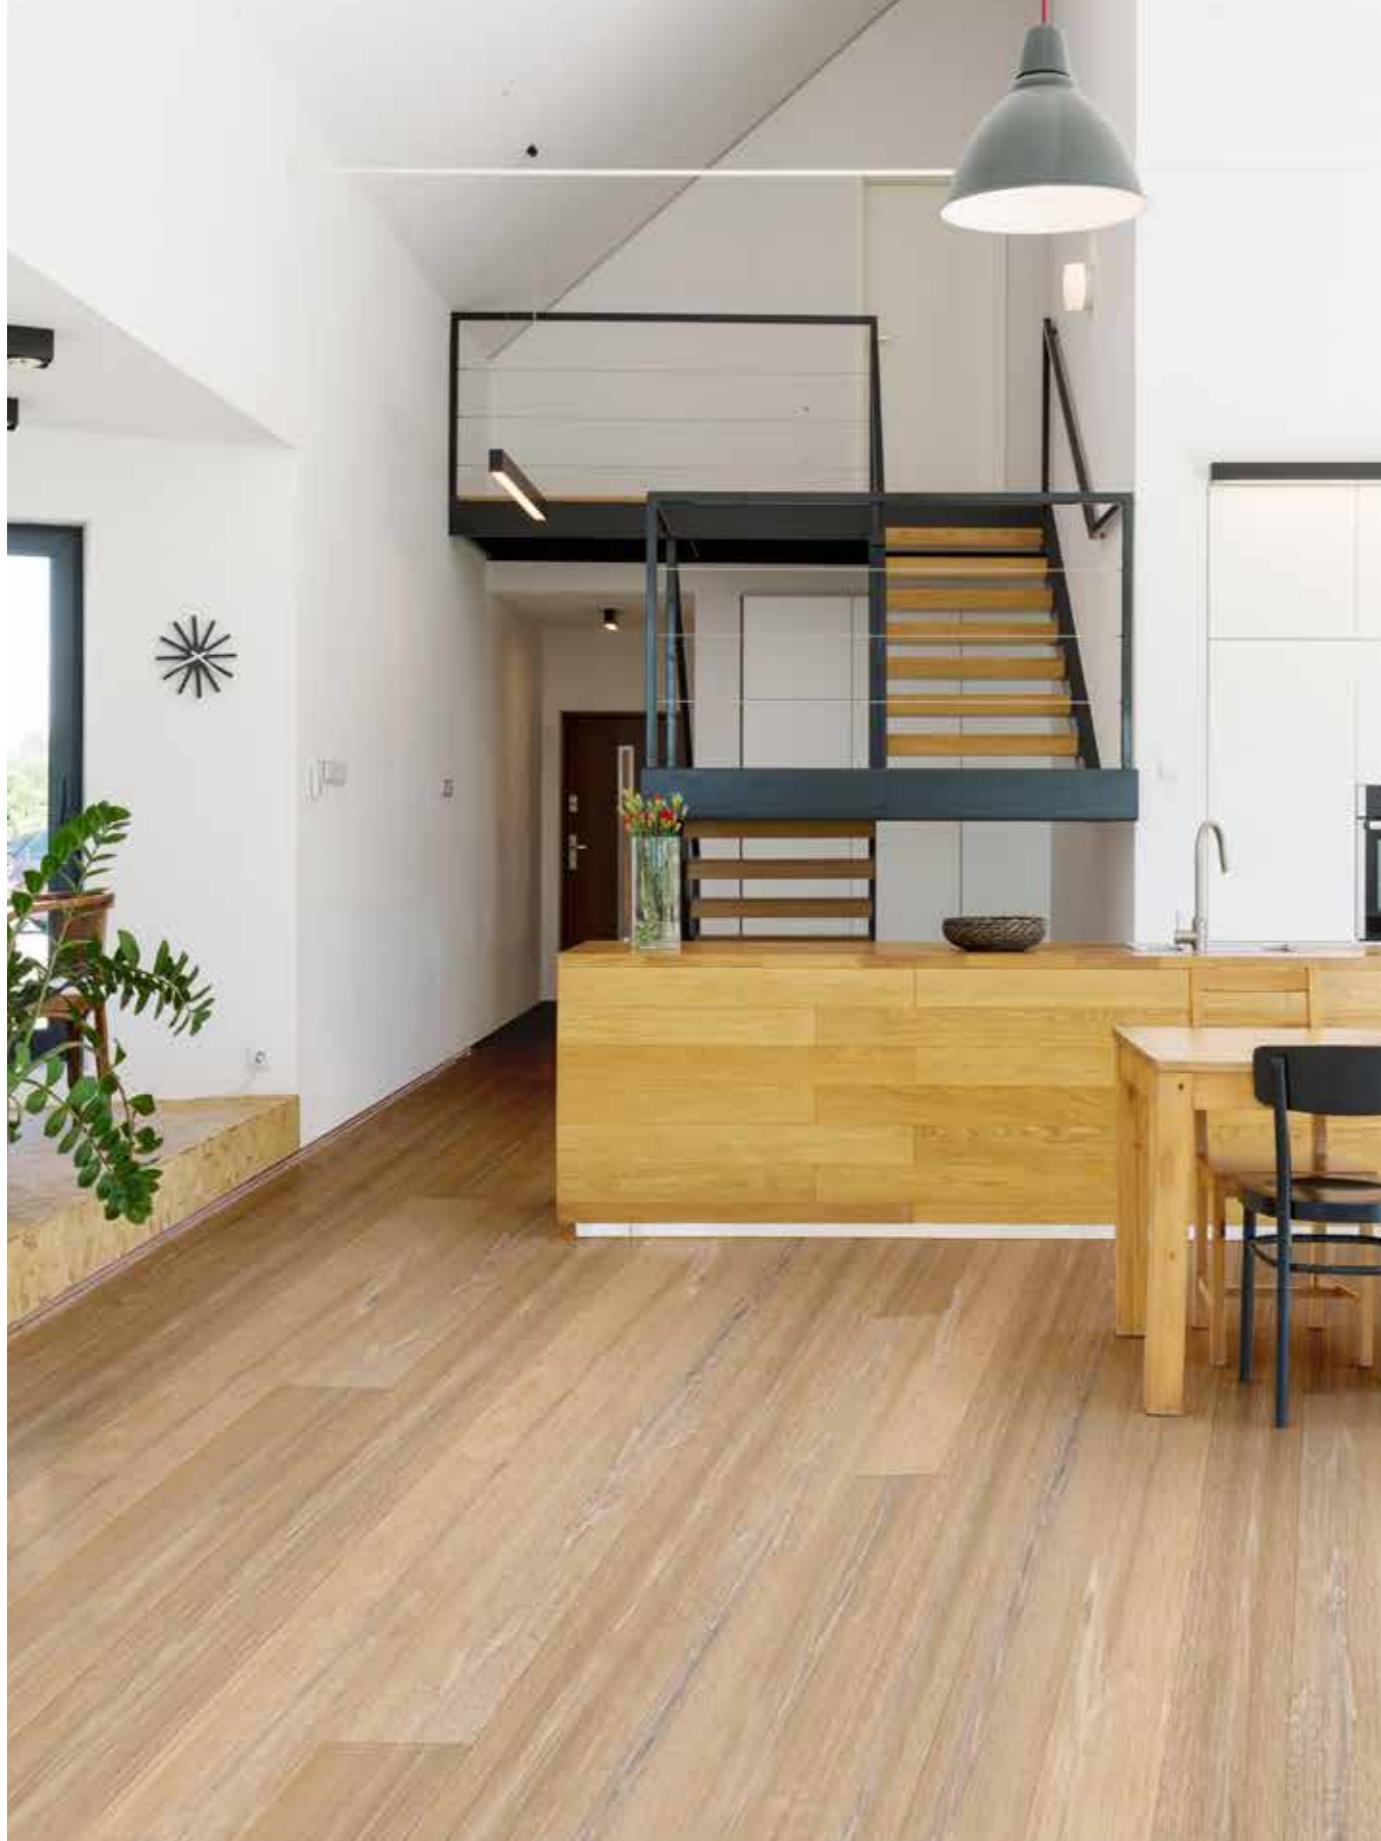

Rozel T33

MANUFACTURER	IVC Commercial
COLOUR TONE	Brown
FINISH	Matt
RANGE	IVC-Mars
STYLE	Roll
THICKNESS	2.5mm
EFFECT	Wood Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	IVC Commercial - Heterogeneous Sheet Vinyl - Compact - 2.3mm/ 0.60mm wear layer - R10 - WR 436 - 2m x 30m Rolls
WATERPROOF	Yes

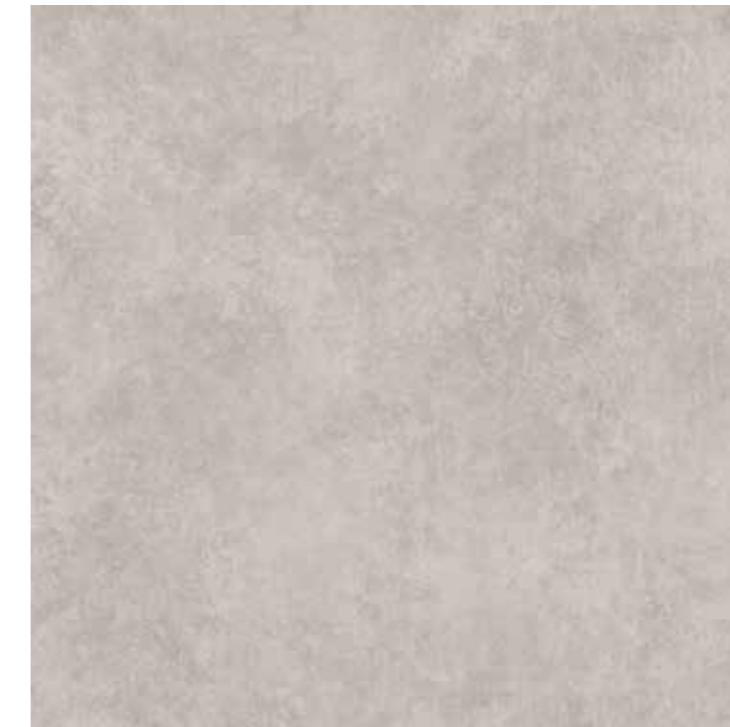


Padua T91

MANUFACTURER	IVC Commercial
COLOUR TONE	Grey
FINISH	Matt
RANGE	IVC-Mars
STYLE	Roll
THICKNESS	2.5mm
EFFECT	Concrete Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	IVC Commercial - Heterogeneous Sheet Vinyl - Compact - 2.3mm/ 0.60mm wear layer - R10 - WR 407 - 2m x 30m Rolls
WATERPROOF	Yes



IVC Commercial - Heterogeneous Sheet Vinyl - Compact / Mars

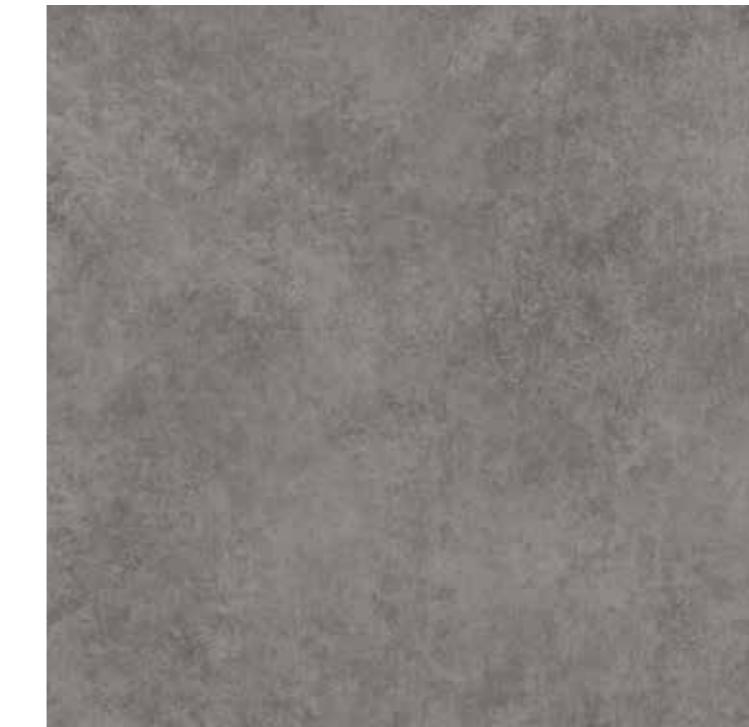

Padua T96

MANUFACTURER	IVC Commercial
COLOUR TONE	Dark Grey
FINISH	Matt
RANGE	IVC-Mars
STYLE	Roll
THICKNESS	2.5mm
EFFECT	Concrete Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	IVC Commercial - Heterogeneous Sheet Vinyl - Compact - 2.3mm/ 0.60mm wear layer - R10 - WR 408 - 2m x 30m Rolls
WATERPROOF	Yes

Centra Collection



ALLURE 733



SEDNA T14




SEDNA T32



SEDNA T92



SEDNA T94

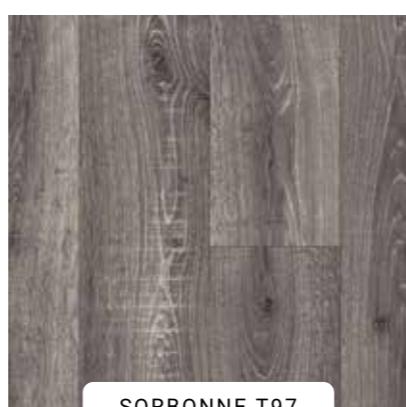

SORBONNE T97

Centra

Technical Specifications

Flooring type / Type de couverture - Type vloer - Fußbodenart	EN ISO 26986	Compact Flooring
Heterogeneous PVC / PVC hétérogène - Heterogene PVC - Heterogene PVC	EN ISO 10874	
Level of use / Classe d'usage - Gebruiksklasse - Eignungsklasse	EN ISO 24346	23 - 34 - 43
Total thickness / Epaisseur totale - Totale dikte - Gesamtdicke	EN ISO 24340	2,00 mm
Wear layer / Couche d'usure - Slijlaag - Nutzschicht		0,70 mm
Wear layer PUR treatment / Traitement polyuréthane - PUR slijlaag behandeling - Schutz vor Schmutz PUR	EN ISO 23997	HyperGuard+
Total weight/m² / Poids total/m ² - Totaal gewicht/m ² - Gewicht/m ²	EN ISO 24341	ca. 2.543 g
Width / Largeur - Breedte - Breite	EN ISO 24341	2-3-4 m
Standard Length / Longueur standard - Standaardlengte - Standardlänge		ca. 25 m
Weight of standard roll / Poids standard des rouleaux - Standaard rolgewicht - Standard-Rollengewicht	EN 13501	ca. 131 - 262 kg
Inflammability / Classement feu - Brandklasse - Brandverhalten	EN 13893	Bfl-S1
Slip resistance / Glissance - Antislip - Rutschfest	DIN 51130	DS
Slip restraint / Résistance au glissement - Slipweerstand - Rutschhemmung	EN ISO 24343-1	R10
Residual indentation / Poinçonnement rémanent - Restindruk - Eindrückverhalten	EN ISO 16581	0,05 mm (norm ≤ 0,20 mm)
Furniture leg resistance / Résistance au pied de meuble - Meubelpoottest - Möbelschubtest	EN ISO 23999	Very good
Curling / Incavation - Krulling - Schüsselung	EN ISO 10965	≤ 8 mm
Electrical resistance / Résistance électrique - Elektrische weerstand - Elektrischer Widerstand	EN 1815	10 ⁹ Ohm
Static electrical propensity / Accumulation de charges électrostatiques - Electrostatische Propensiteit - Elektrostatische Verhaltung	EN ISO 23999	≤ 2kV (antistatic)
Dimensional stability / Stabilité dimensionnelle - Dimensionele stabiliteit - Massänderung	EN ISO 10456	0,05% (norm ≤ 0,40%)
Thermal conductivity / Conductivité thermique - Warmtedoorgangscoëfficiënt - Wärmeleitfähigkeit	EN ISO 12664	0,25 W/(m.K)
Heat insulation / Isolation thermique - Thermische isolatie - Wärmedurchlasswiderstand	EN ISO 10582	0,0080 (m ² .K/W)
Binder quantity in wear layer / Taux de liant dans la couche d'usure - Hoeveelheid bindmiddel in slijlaag - Bindemittelmenge in der Nutzschicht	EN 660-2	Type I
Abrasion group / Groupe d'abrasion - Slijtageweerstand - Verschleißverhalten		Class T
Indoor air quality / Qualité de l'air intérieur - Binnenmilieu - Raumluftqualität	EN ISO 717-2	LOW VOC
Acoustic insulation / Efficacité acoustique - Kontaktgeluidisolatie - Tritschallverbesserungsmaß	EN ISO 4918	ΔLw 7 dB
Castor chair resistance / Résistance aux chaises à roulettes - Bestand tegen stoelwielen - Stuhrollenfestigkeit	EN 12529	Pass
Castor type / Type de chaises à roulettes - Type stoelwielen - Stuhrolle Typ	ISO 105B02	Type W
Light fastness / Résistance à la lumière - Lichtechniek - Lichtechnheit	EN 12524	6
Underfloor heating / Chauffage par le sol - Vloerverwarming - Bodenheizung	EN ISO 26987	Suitable
Resistance to chemicals / Résistance aux produits chimiques - Chemicalienresistentie - Chemikalienbeständigkeit		Very good
Hot welding / Soudage thermique - Warm lassen - Thermische Verschweißung	Invisiweld	Available
Cold welding / Soudage à froid - Koud lassen - Kaltverschweißung		Suitable
Warranty years / Garantie ans - Garantie in jaren - Garantie Jahren		5

The warranty covers manufacturing defects and premature wear in the event of normal use | La garantie couvre les vices de fabrication et l'usure précoce en usage normal
De garantie dekt fabrikagefouten en voorstijdig afslaan bij normaal gebruik | Die Garantie deckt Herstellungsfehler und vorzeitigen Verschleiß bei normaler Nutzung

IVC reserves the right to change or amend any written information without notice.
Ensure the latest information is being consulted by referring to the website.





IVC Commercial - Heterogeneous Sheet Vinyl - Compact / Centra



Allure T33

MANUFACTURER	IVC Commercial
COLOUR TONE	Grey
FINISH	Matt
RANGE	IVC-Centra
STYLE	Roll
THICKNESS	2.5mm
EFFECT	Wood Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	IVC Commercial - Heterogeneous Sheet Vinyl - Compact - 2mm/ 0.70mm wear layer - 7 dB - R10 - WR 432 - 2m x 25mm Rolls
WATERPROOF	Yes




IVC Commercial - Heterogeneous Sheet Vinyl - Compact / Centra




Sedna T14

MANUFACTURER	IVC Commercial
COLOUR TONE	Orange
FINISH	Matt
RANGE	IVC-Centra
STYLE	Roll
THICKNESS	2.5mm
EFFECT	Concrete Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	IVC Commercial - Heterogeneous Sheet Vinyl - Compact - 2mm/ 0.70mm wear layer - 7 dB - R10 - WR 464 - 2m x 25m Rolls
WATERPROOF	Yes

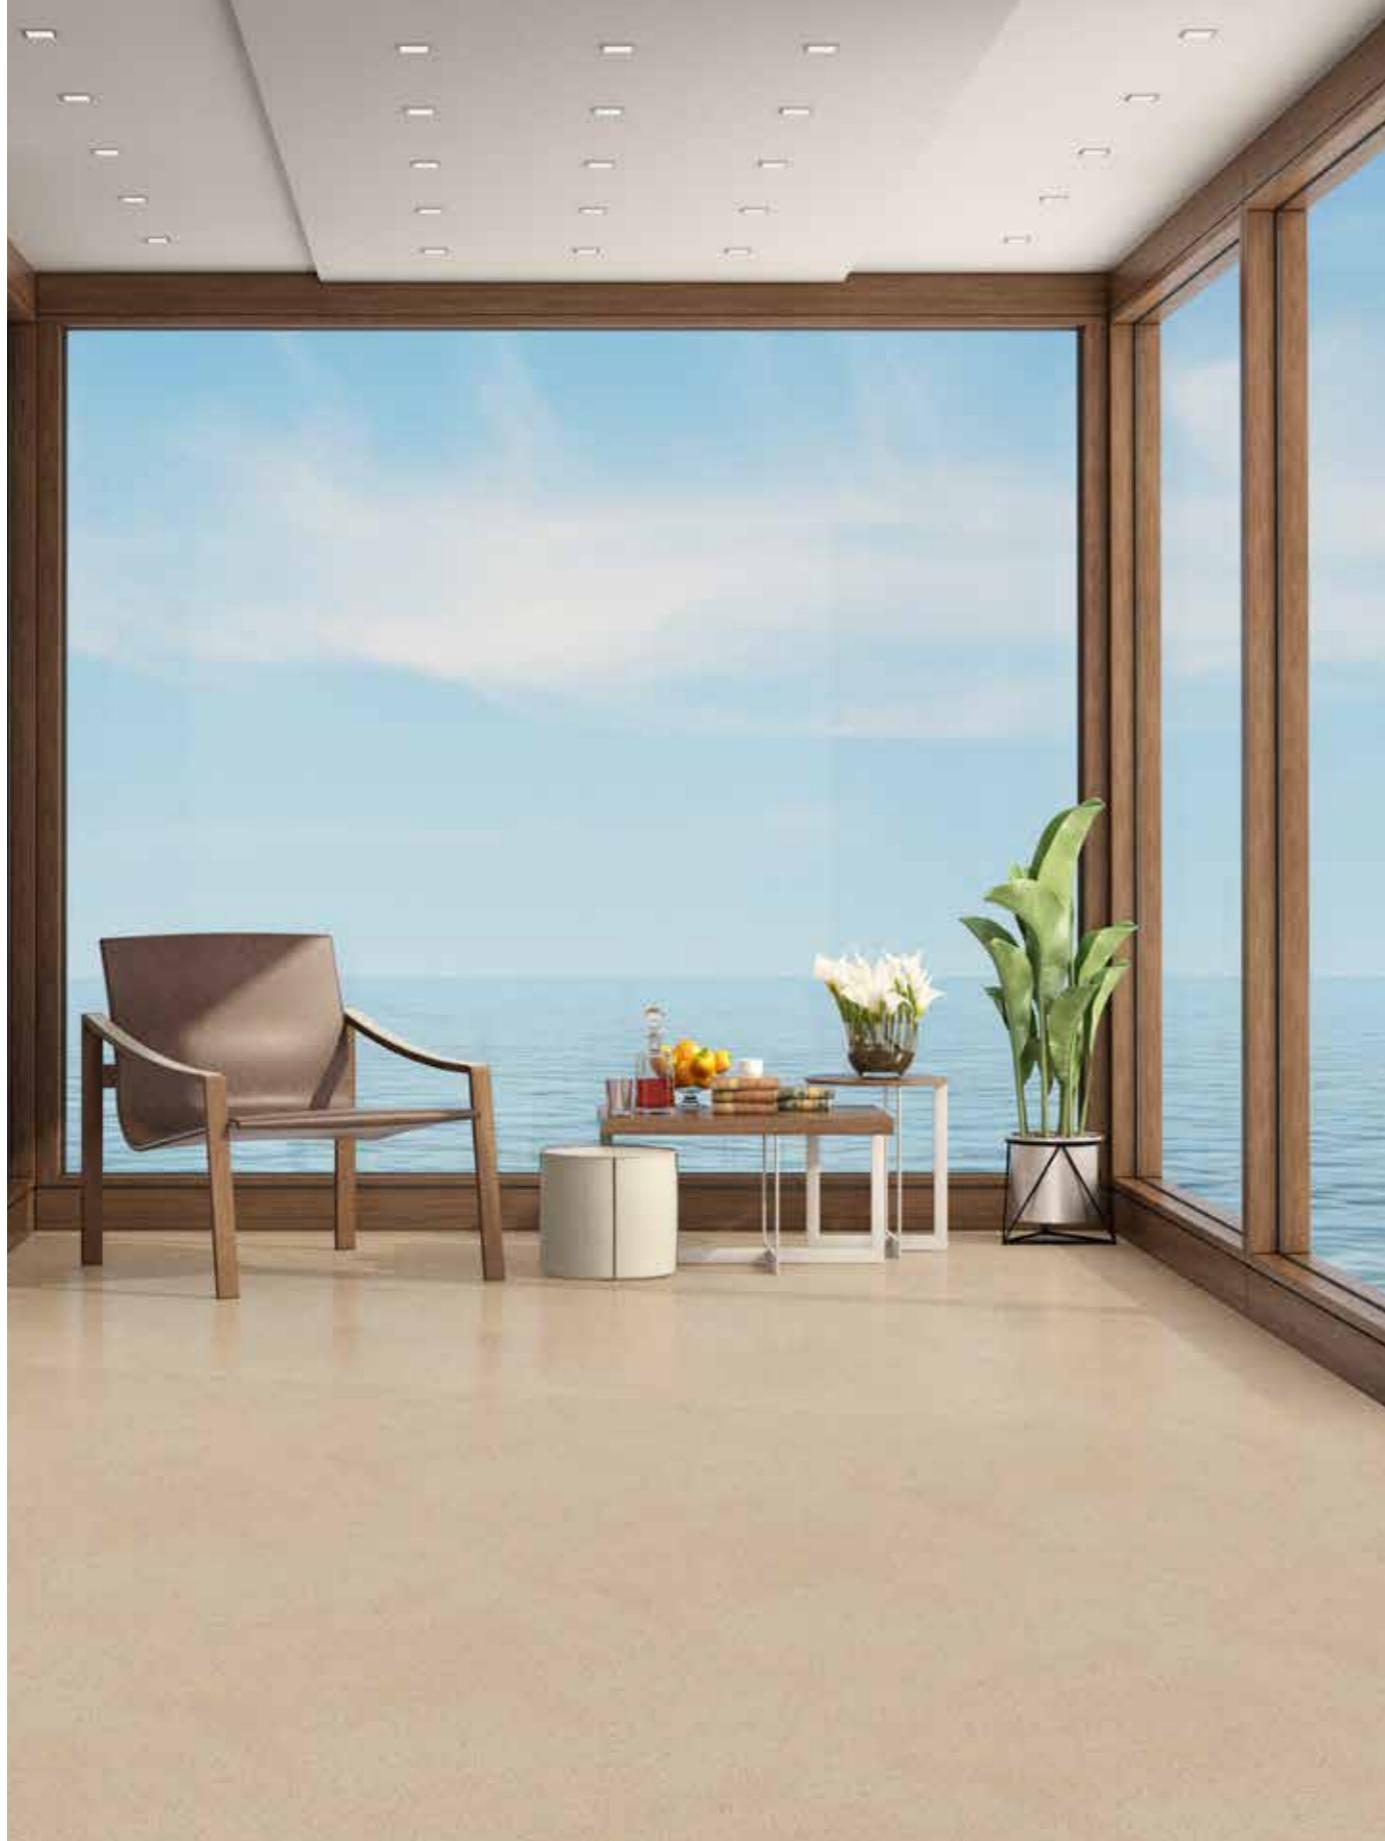

Sedna T32

MANUFACTURER	IVC Commercial
COLOUR TONE	Beige
FINISH	Matt
RANGE	IVC-Centra
STYLE	Roll
THICKNESS	2.5mm
EFFECT	Concrete Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	IVC Commercial - Heterogeneous Sheet Vinyl - Compact - 2mm/ 0.70mm 7 dB - R10 - WR 455 - 2m x 25m Rolls
WATERPROOF	Yes

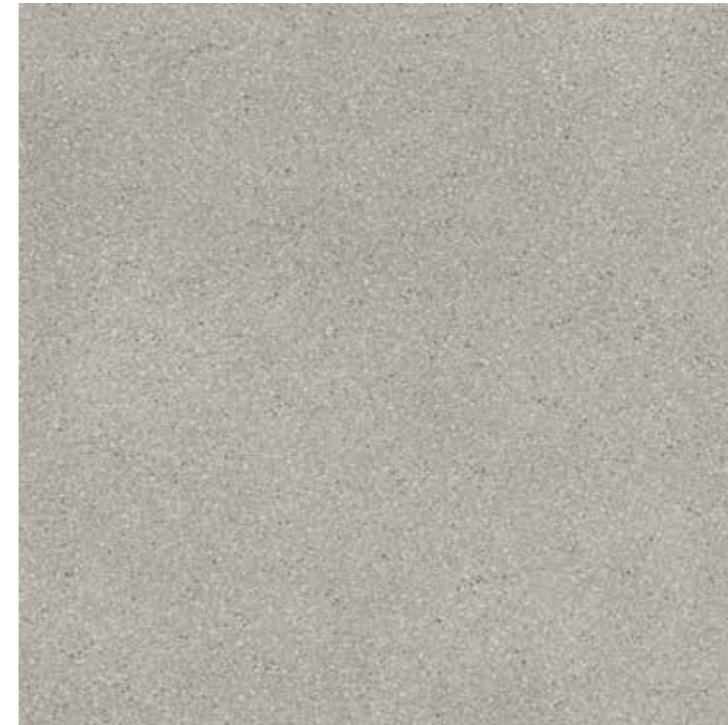


Sedna T92

MANUFACTURER	IVC Commercial
COLOUR TONE	Grey
FINISH	Matt
RANGE	IVC-Centra
STYLE	Roll
THICKNESS	2.5mm
EFFECT	Concrete Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	IVC Commercial - Heterogeneous Sheet Vinyl - Compact - 2mm/ 0.70mm wear layer - 7 dB - R10 - WR 409 - 2m x 25mm Rolls
WATERPROOF	Yes



IVC Commercial - Heterogeneous Sheet Vinyl - Compact / Centra

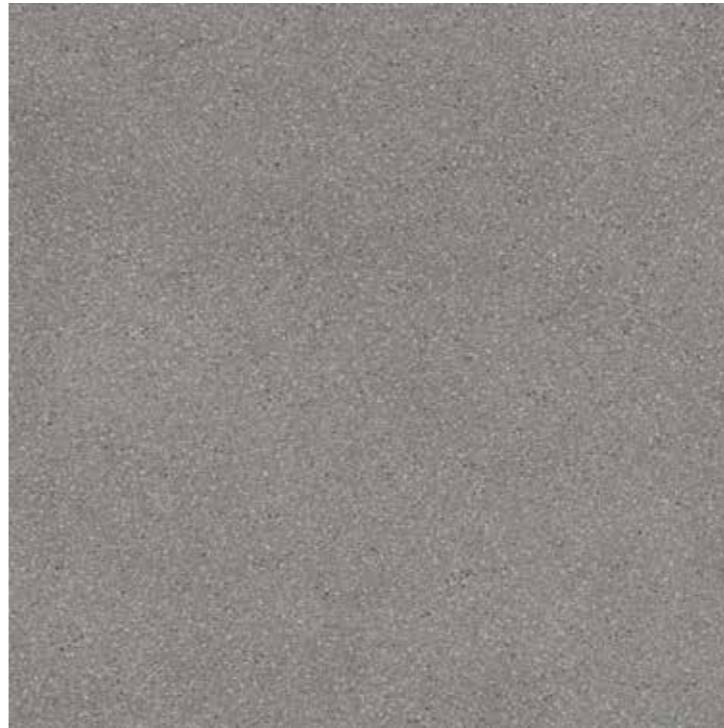

Sedna T94

MANUFACTURER	IVC Commercial
COLOUR TONE	Dark Grey
FINISH	Matt
RANGE	IVC-Centra
STYLE	Roll
THICKNESS	2.5mm
EFFECT	Concrete Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	IVC Commercial - Heterogeneous Sheet Vinyl - Compact - 2mm/ 0.70mm wear layer - 7 dB - R10 - WR 408 - 2m x 25mm Rolls
WATERPROOF	Yes




IVC Commercial - Heterogeneous Sheet Vinyl - Compact / Centra



Sorbonne T97

MANUFACTURER	IVC Commercial
COLOUR TONE	Dark Grey
FINISH	Matt
RANGE	IVC-Centra
STYLE	Roll
THICKNESS	2.5mm
EFFECT	Wood Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	IVC Commercial - Heterogeneous Sheet Vinyl - Compact - 2mm/ 0.70mm wear layer - 7 dB - R10 - WR 492 - 2m x 25mm Rolls
WATERPROOF	Yes


Silento 50 Collection

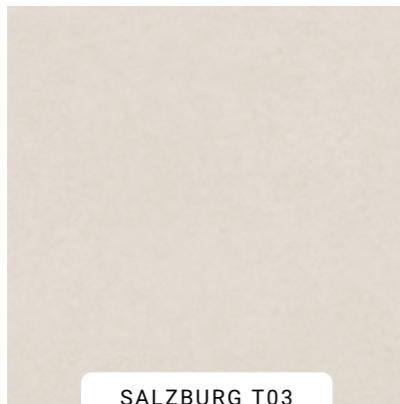

SALZBURG T03



SALZBURG T90

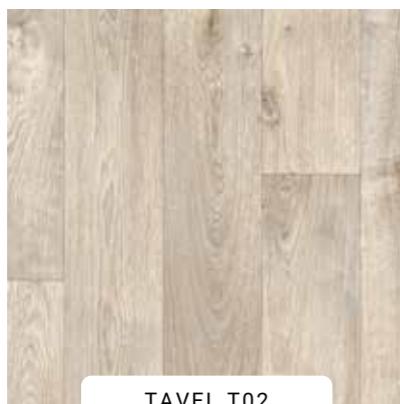

TAVEL T02



TORONTO T10

Silento 50

Technical Specifications

Flooring type /	Type de couverture - Type vloer - Fußbodenart	Acoustic Flooring
Heterogeneous PVC /	PVC hétérogène - Heterogene PVC - Heterogene PVC	EN ISO 11638
Level of use /	Classe d'usage - Gebruiksklasse - Eignungsklasse	EN ISO 10874 23 - 33
Total thickness /	Epaisseur totale - Totale dikte - Gesamtdicke	EN ISO 24346 3,00 mm
Wear layer /	Couche d'usure - Slijlaag - Nutzschicht	EN ISO 24340 0,50 mm
Wear layer PUR treatment /	Traitement polyuréthane - PUR slijlaag behandeling - Schutz vor Schmutz PUR	HyperGuard+
Total weight/m² /	Poids total/m ² - Totaal gewicht/m ² - Gewicht/m ²	EN ISO 23997 ca. 2.198 g
Width /	Largeur - Breedte - Breite	EN ISO 24341 2-4 m
Standard Length /	Longueur standard - Standaardlengte - Standardlänge	EN ISO 24341 ca. 25 m
Weight of standard roll /	Poids standard des rouleaux - Standaard rolgewicht - Standard-Rollengewicht	ca. 114 - 228 kg
Inflammability /	Classement feu - Brandklasse - Brandverhalten	EN 13501 Bfl-S1 (fully glued)
Slip resistance /	Glissance - Antislip - Rutschfest	EN 13893 DS
Slip restraint /	Résistance au glissement - Slipweerstand - Rutschhemmung	DIN 51130 R10
Residual indentation /	Poinçonnement rémanent - Restindruck - Eindrückverhalten	EN ISO 24343-1 0,16 mm (norm ≤ 0,20 mm)
Furniture leg resistance /	Résistance au pied de meuble - Meubelpoottest - Möbelschubtest	EN ISO 16581 Very good
Curling /	Incurvation - Krulling - Schüsselung	EN ISO 23999 ≤ 8 mm
Electrical resistance /	Résistance électrique - Elektrische weerstand - Elektrischer Widerstand	EN ISO 10965 10 ⁹ Ohm
Static electrical propensity /	Accumulation de charges électrostatiques - Electrostatica Propensiteit - Elektrostatische Verhaltung	EN 1815 ≤ 2kV (antistatic)
Dimensional stability /	Stabilité dimensionnelle - Dimensionale stabilität - Massänderung	EN ISO 23999 0,05% (norm ≤ 0,40%)
Thermal conductivity /	Conductivité thermique - Warmteodoorgangscoefficient - Wärmeleitfähigkeit	EN ISO 10456 0,25 W/(m.K)
Heat insulation /	Isolation thermique - Thermische isolatie - Wärmedurchlasswiderstand	EN ISO 12664 0,0275 (m ² .K/W)
Binder quantity in wear layer /	Tau de liant dans la couche d'usure - Hoeveelheid bindmiddel in slijlaag - Bindmittelmenge in der Nutzschicht	EN 10582 Type I
Abrasion group /	Groupe d'abrasion - Slijtagewerstand - Verschleißverhalten	EN 660-2 Class T
Indoor air quality /	Qualité de l'air intérieur - Binnenmilieu - Raumluftqualität	LOW VOC
Acoustic insulation /	Efficacité acoustique - Kontaktgeluidisolatie - Tritschallverbesserungsmaß	EN ISO 717-2 ΔLw 18 dB
Castor chair resistance /	Résistance aux chaises à roulettes - Bestand tegen stoelwielen - Stuhrollenfestigkeit	EN ISO 4918 Pass
Castor type /	Type de chaises à roulettes - Type stoelwielen - Stuhrollen Typ	EN 12529 Type W
Light fastness /	Résistance à la lumière - Lichtechniehdeid - Lichtechniehdeit	ISO 105B02 6-7
Underfloor heating /	Chauffage par le sol - Vloerverwarming - Bodenheizung	EN 12524 Suitable
Resistance to chemicals /	Résistance aux produits chimiques - Chemicalienresistentie - Chemikalienbeständigkeit	EN ISO 26987 Very good
Hot welding /	Soudage thermique - Warm lassen - Thermische Verschweißung	Available
Cold welding /	Soudage à froid - Koud lassen - Kaltverschweißung	Invisiweld Suitable
Warranty years /	Garantie ans - Garantie in jaren - Garantie Jahren	5

The warranty covers manufacturing defects and premature wear in the event of normal use | La garantie couvre les vices de fabrication et l'usure précoce en usage normal
De garantie dekt fabricagefouten en voorvrijig afslijten bij normaal gebruik | Die Garantie deckt Herstellungsfehler und vorzeitigen Verschleiß bei normaler Nutzung

IVC reserves the right to change or amend any written information without notice.
Ensure the latest information is being consulted by referring to the website.






Salzburg T03

MANUFACTURER	IVC Commercial
COLOUR TONE	Light Beige
FINISH	Matt
RANGE	IVC-Silento 50
STYLE	Roll
THICKNESS	3 mm
EFFECT	Concrete Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	IVC Commercial - Heterogeneous Sheet Vinyl - Acoustic - 3mm/ 0.50mm wear layer - 18 dB - R10 - WR 432 - 2m x 25m Rolls
WATERPROOF	Yes



IVC Commercial - Heterogeneous Sheet Vinyl - Acoustic / Silento 50

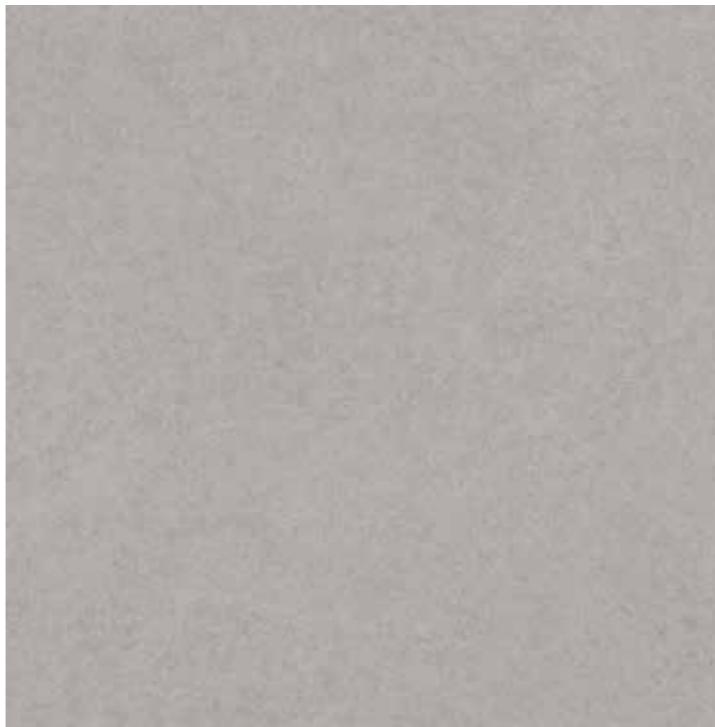

Salzburg T90

MANUFACTURER	IVC Commercial
COLOUR TONE	Dark Grey
FINISH	Matt
RANGE	IVC-Silento 50
STYLE	Roll
THICKNESS	3 mm
EFFECT	Concrete Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	IVC Commercial - Heterogeneous Sheet Vinyl - Acoustic - 3mm/ 0.50mm wear layer - 18 dB - R10 - WR 492 - 2m x 25m Rolls
WATERPROOF	Yes




IVC Commercial - Heterogeneous Sheet Vinyl - Acoustic / Silento 50




Tavel T02

MANUFACTURER	IVC Commercial
COLOUR TONE	Light Brown
FINISH	Matt
RANGE	IVC-Silento 50
STYLE	Roll
THICKNESS	3 mm
EFFECT	Wood Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	IVC Commercial - Heterogeneous Sheet Vinyl - Acoustic - 3mm/ 0.50mm wear layer - 18 dB - R10 - WR 407 - 2m x 25m Rolls
WATERPROOF	Yes

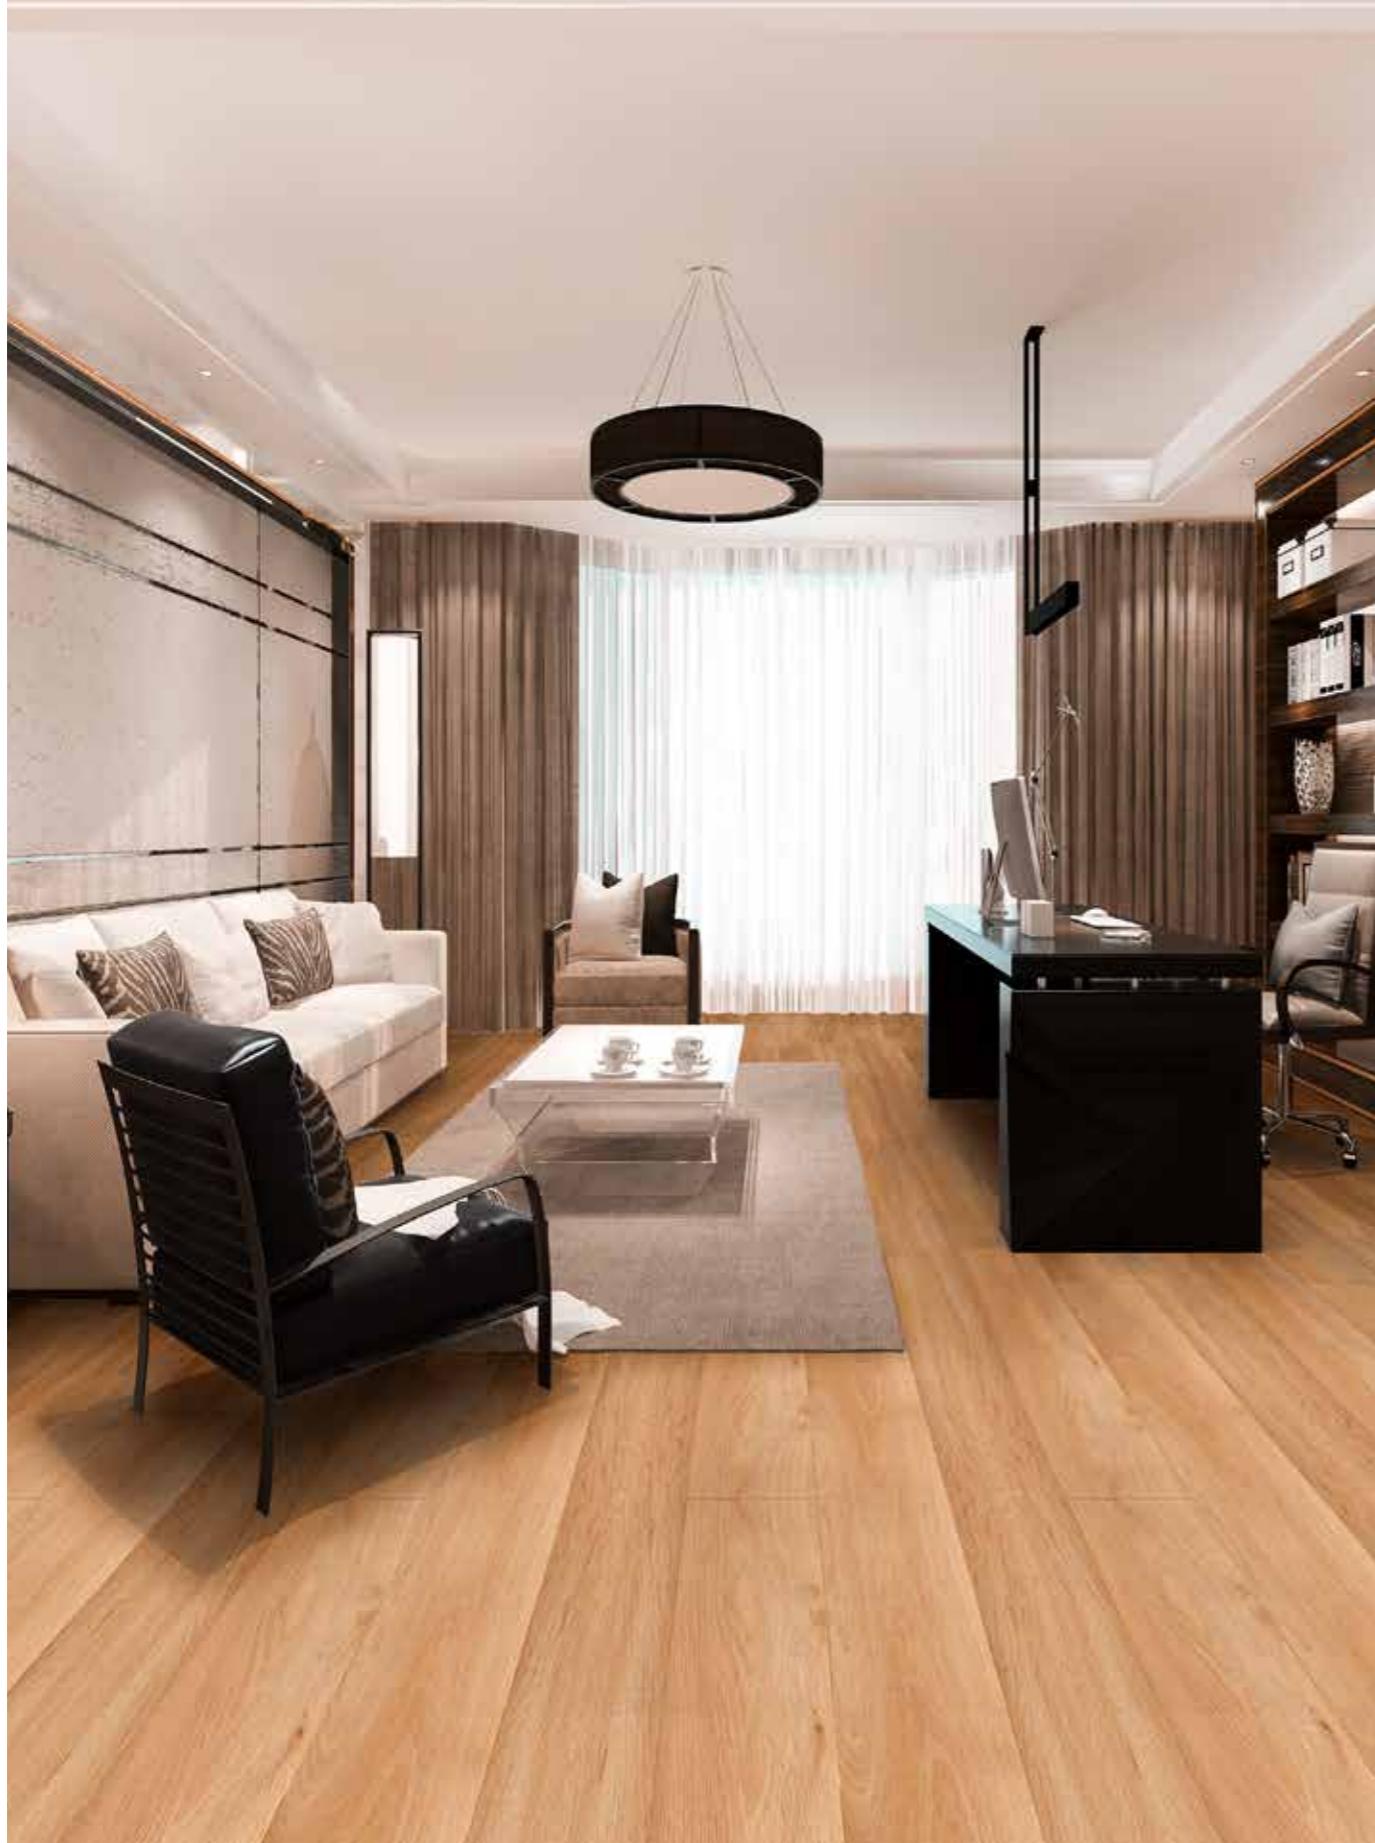

Toronto T10

MANUFACTURER	IVC Commercial
COLOUR TONE	Brown
FINISH	Matt
RANGE	IVC-Silento 50
STYLE	Roll
THICKNESS	3 mm
EFFECT	Wood Effect
RESIDENTIAL WARRANTY	10 Years Residential
FLOOR TYPE	Sheet Vinyl
SURFACE	Smooth
INSTALLATION	Glue Down
DESCRIPTION	IVC Commercial - Heterogeneous Sheet Vinyl - Acoustic - 3mm/ 0.50mm wear layer - 18 dB - R10 - WR 435 - 2m x 25m Rolls
WATERPROOF	Yes

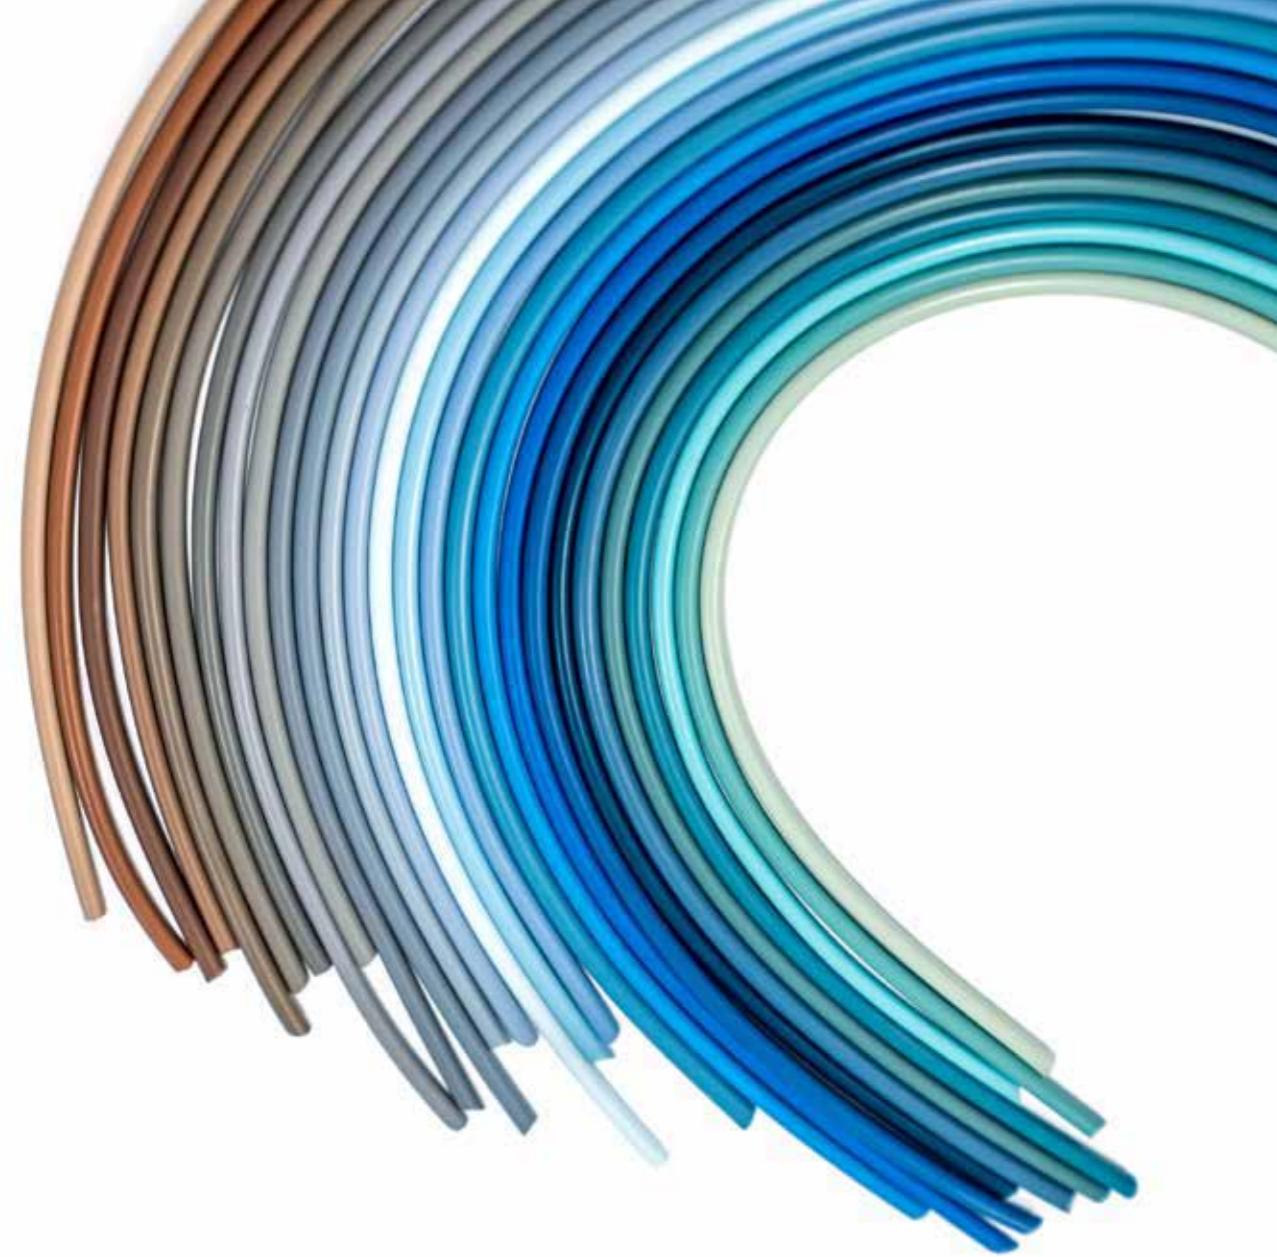

Accessories

Smart flooring solutions to ease your mind

Finding the right floor for your project is one thing, but installing, finishing and maintaining it can also be a fraught process.

We've thought of everything to help make these steps easier.

Whether you're looking for high-quality skirting boards, the right adhesive, specialised tapes, welding products and other installation products, we have the solution.



Go to ivc-commercial.com
and discover updates of our
accessories collection.

Adhesives

High temperature adhesive

available in 5 kg (343935) and 15 kg (343937)

Bonding IVC Commercial Heterogeneous Vinyl floor coverings to a subfloor in an area subject to thermal fluctuation? Use our high temperature adhesive. This solvent-free, low-emission fibre-filled adhesive guarantees perfect dimensional stability. Ideal for spaces with a lot of direct sunlight or places subject to excessive heat. Use on sound and dry subfloors. Warranted by IVC Commercial.

Pressure sensitive adhesive

available in 5 kg (343936) and 15kg (343669)

Securing your IVC Commercial Heterogeneous Vinyl floor coverings to subfloors? Our solvent-free adhesive will tackle the task. A quality adhesive for bonding IVC Commercial Heterogeneous Vinyl floor coverings on suitably sound and dry subfloors. Warranted by IVC Commercial.

Loose Lay Tape

100 mm x 50 m (343915)

With this specialised tape, your loose lay Heterogeneous Vinyl floor is guaranteed to stand its ground, while remaining easy to remove and replace. The tape guarantees 100% Loose Lay vinyl floor installation. Warranted by IVC Commercial.

Velcro universal flooring tape

100 mm x 25 m (343660)

Do you want your Heterogeneous Vinyl floors with textile backing to stick around? Use this specially engineered Velcro tape. The ideal solution for installation of vinyl flooring with a textile backing. Warranted by IVC Commercial.


Welding

Invisiweld / cold welding

Invisiweld technology gives the ability to achieve an almost imperceptible join with all IVC Commercial Heterogeneous Vinyl floor coverings. Fast, clean and easy to use, Invisiweld is economical and leaves a seamless, strong and watertight join. Invisiweld is available in an Invisiweld Starterbox (343928), Invisiweld type A for standard seams (343927), Invisiweld type C for wider seams and gaps (343926), Invisiweld type T for textile backing (343929) and Invisiweld welding tape (343925). Warranted by IVC Commercial.



Steps

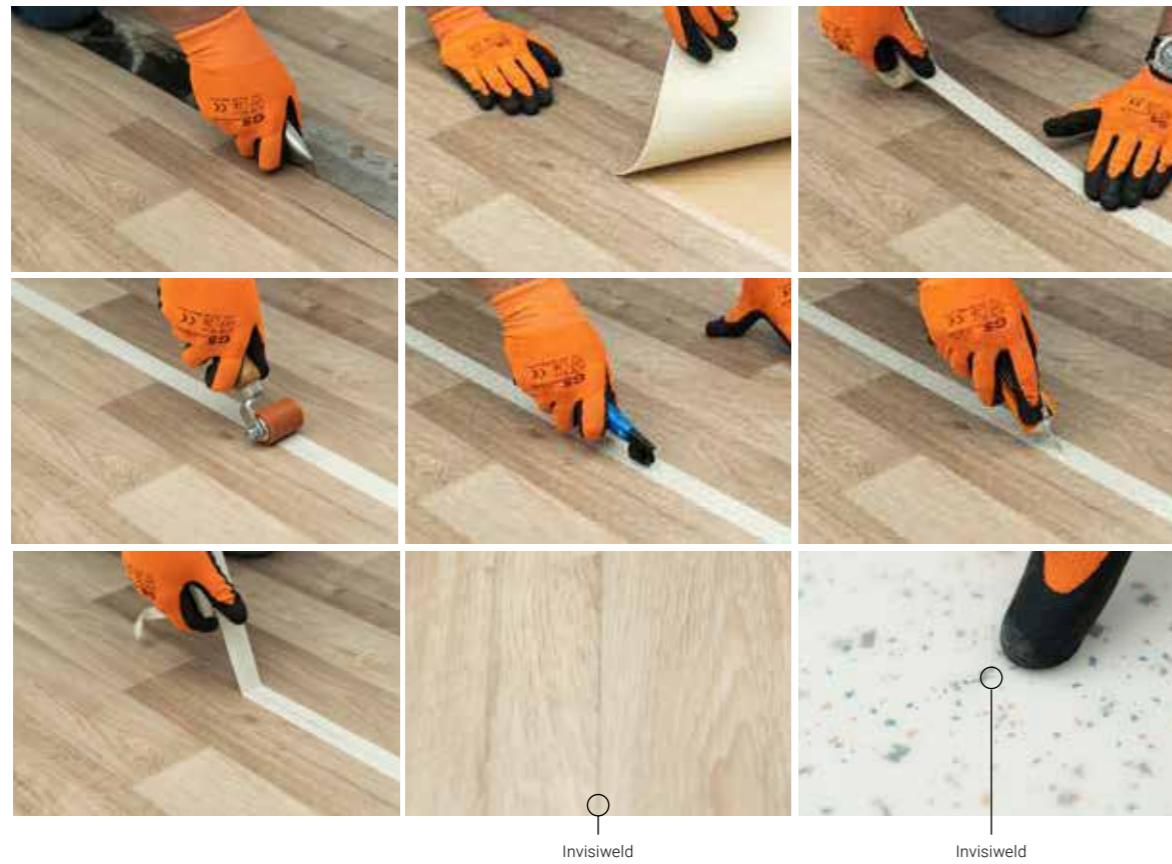

Invisiweld

Invisiweld


Hot welding

Ø 4 mm x 100 m length

IVC Commercial offers a wide range of welding rods. Join your Heterogeneous Vinyl into a colour-matched welding, or create a contrasting weld. Either way will result in a strong and beautiful solution that is strong and beautiful. Warranted by IVC Commercial.



Steps

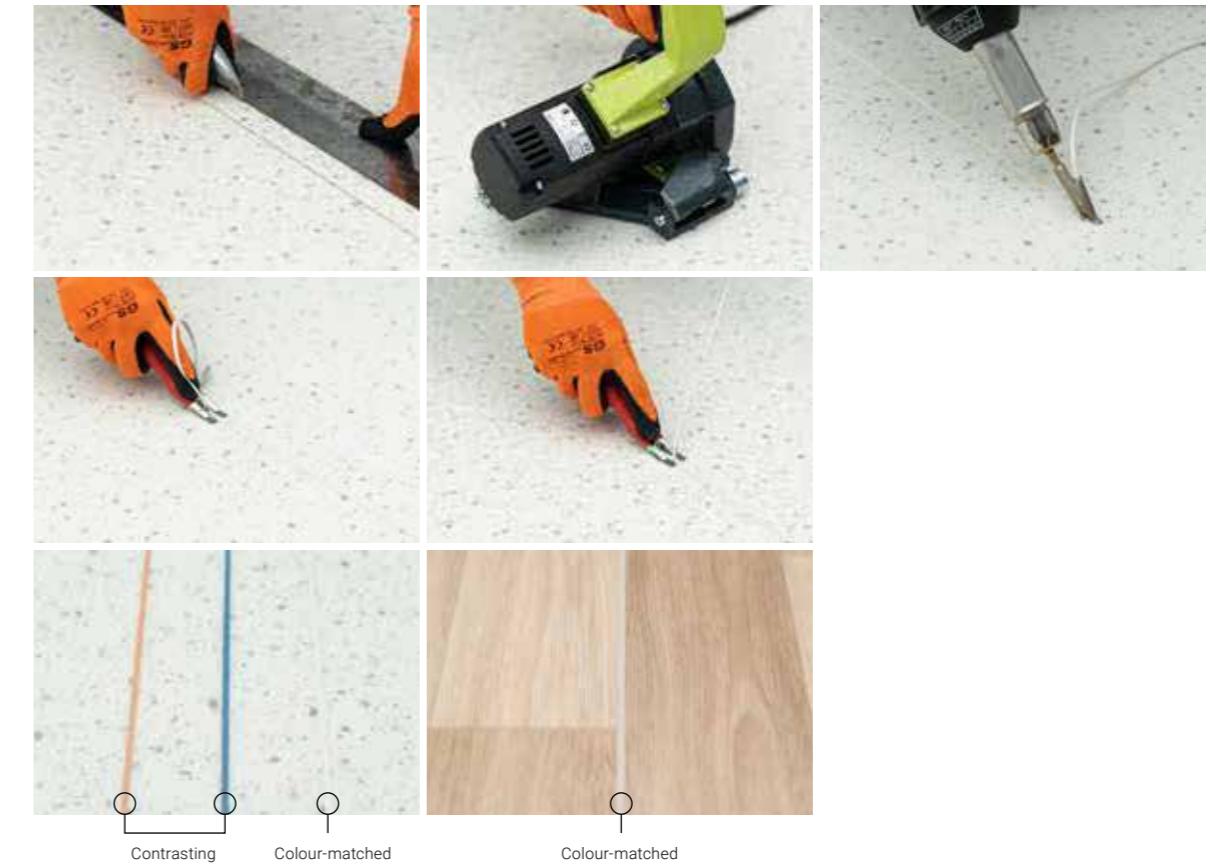

Contrasting welding

Colour-matched welding

Colour-matched welding

This is only a summary of the full installation instructions. Please check our website: ivc-commercial.com for more details.

Skirtings

Paintable standard skirting (340239) **and paintable renovation skirting** (340238)

Our paintable skirting boards are low maintenance and wear-resistant, providing the best way to hide cables and wires. Unlike other paintable skirting boards, they are also water-resistant. Supplied pre-primed for easy finishing.

Paintable standard skirting



Paintable renovation skirting



Entrance mats

Step Up

60,96 cm x 60,96 cm x 0,9 cm

Step Up is available in four neutral yet captivating shades (400063888, 400063887, 400063886 and 400063885) that set the tone for whatever striking interior lies beyond the entrance. As a buffer between the outdoors and the inside, Step Up catches up to 80% of all incoming dirt, resulting in beautiful, flawless Heterogeneous Vinyl flooring throughout the rest of the building.



Quality


Research & Development

Always on the way to keep the quality of our products on a high and consistent level, we manage in house different quality tests.



Tear test

The force required to tear a vinyl floor. This force is measured in Newtons. The various European or international standards provide for a variety of specific methods.

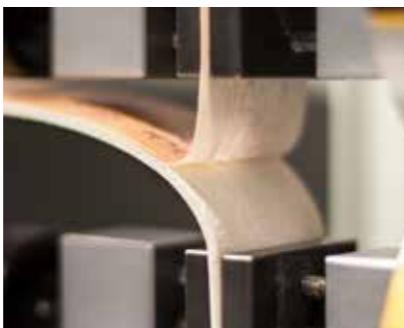

Delamination test

The delamination test is used to test the adhesion between the various layers. It measures the force required to separate the layers from each other. This may apply to the wear layer, the intermediate layer, or to the backing.



Indentation test

This test measures the residual indentation and elasticity of the vinyl: the extent to which the vinyl floor recovers its original shape after being exposed to a force of 50 kg/cm^2 for 2.5 hours.



Wheelchair test

This procedure determines changes in the appearance and the stability of resilient floor coverings, under the movement of a wheel chair (25,000 to 50,000 revolutions). The wear of each quality is measured and evaluated in this manner.



Dimensional stability and curling

This examines the degree of curling, shrinkage or expansion of vinyl floorings. During this procedure, the product is heated at 80°C for 6 hours, after which it is acclimated at room temperature for a certain period.



Thickness

The thickness of the vinyl flooring is measured to verify compliance with European laws.



Wear layer

Microscopy is used to measure the exact thickness of the individual wear layer.




Furniture leg test


Three types of furniture legs are used for this purpose. We mechanically drag the furniture leg over the vinyl with a pressure of 100 kg to assess the extent of damage caused to the vinyl coating. This is done in the longitudinal as well as the transverse direction.

Technology


Compact Flooring EN ISO 10582

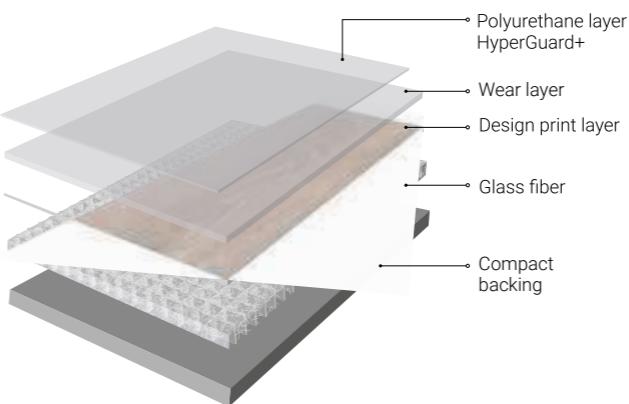


Acoustic Flooring EN ISO 11638

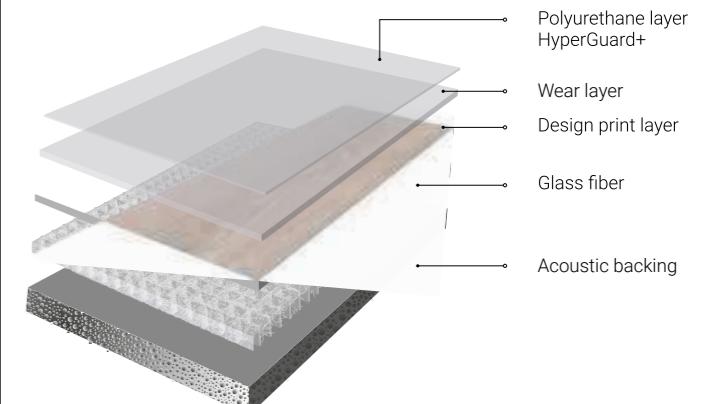


Loose Lay Flooring Nomad collection

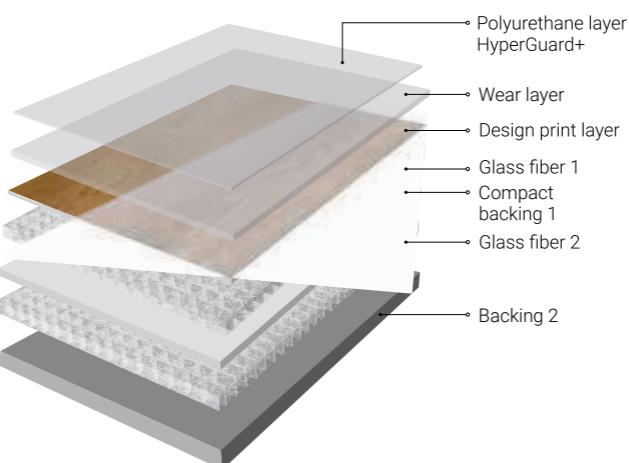

Semi-Loose Lay Flooring Textile Backing

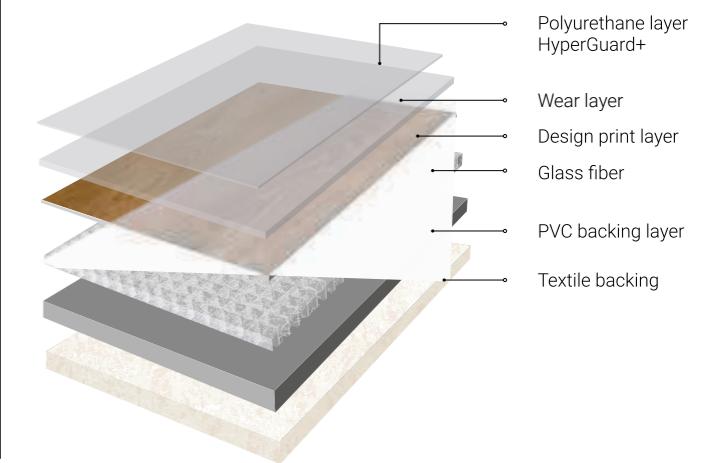

Safety Flooring EN ISO 10582 / 13845

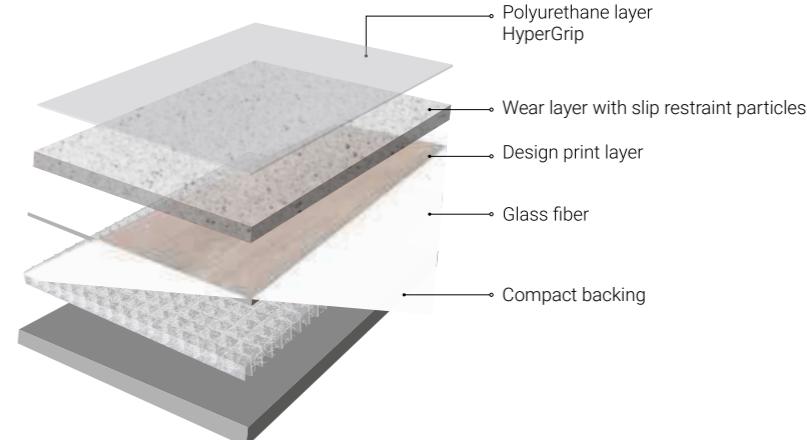

Future-proof, for you and for the planet

At IVC Group, we truly believe in products that are developed with the future in mind. That's why we take the time to pause and reflect on the impacts of our entire strategy and operation. But we also realise that actions speak louder than words, so here's how we raise the industry standard for sustainability, day after day.

“

Through our certified processes, skilled and inspired people and product portfolio that combines good value and corporate social responsibility, we really make the difference, for you and for the planet.”

- Through resource conservation and waste reduction, we minimise the environmental impact of our manufacturing and distribution operations.
- Our energy-efficient flooring plants are among the leanest and greenest in their class.
- To get our products to you, inland waterways are the logical choice.
- We invest in clean-air technology and cutting-edge manufacturing methods.
- We use as many recycled or renewable materials as possible – think of eco-friendly inks and recycled PVC.
- We hold all suppliers accountable for ensuring that products are made in a responsible manner – one that respects both labour and environment.





PRODUCT CATALOGUE

www.ivc-commercial.com

EXCLUSIVE DISTRIBUTOR:



ABU DHABI - DUBAI - SHARJAH - AL AIN - RAS AL KHAIMAH - OMAN

TOLL FREE: 800 FLOOR (35667)