

SIGNATURE  
COLLECTIONS

NYLON COMMERCIAL CARPET TILES

# HURRICANE





Product: Hurricane - 01  
Code: BCM-SIG-HUR-01


BCM-SIG-HUR-01  
BCM-SIG-HUR-02  
BCM-SIG-HUR-03

50cm  
50cm  
TILE



Product: Hurricane - 02  
Code: BCM-SIG-HUR-02

50cm  
50cm  
TILE

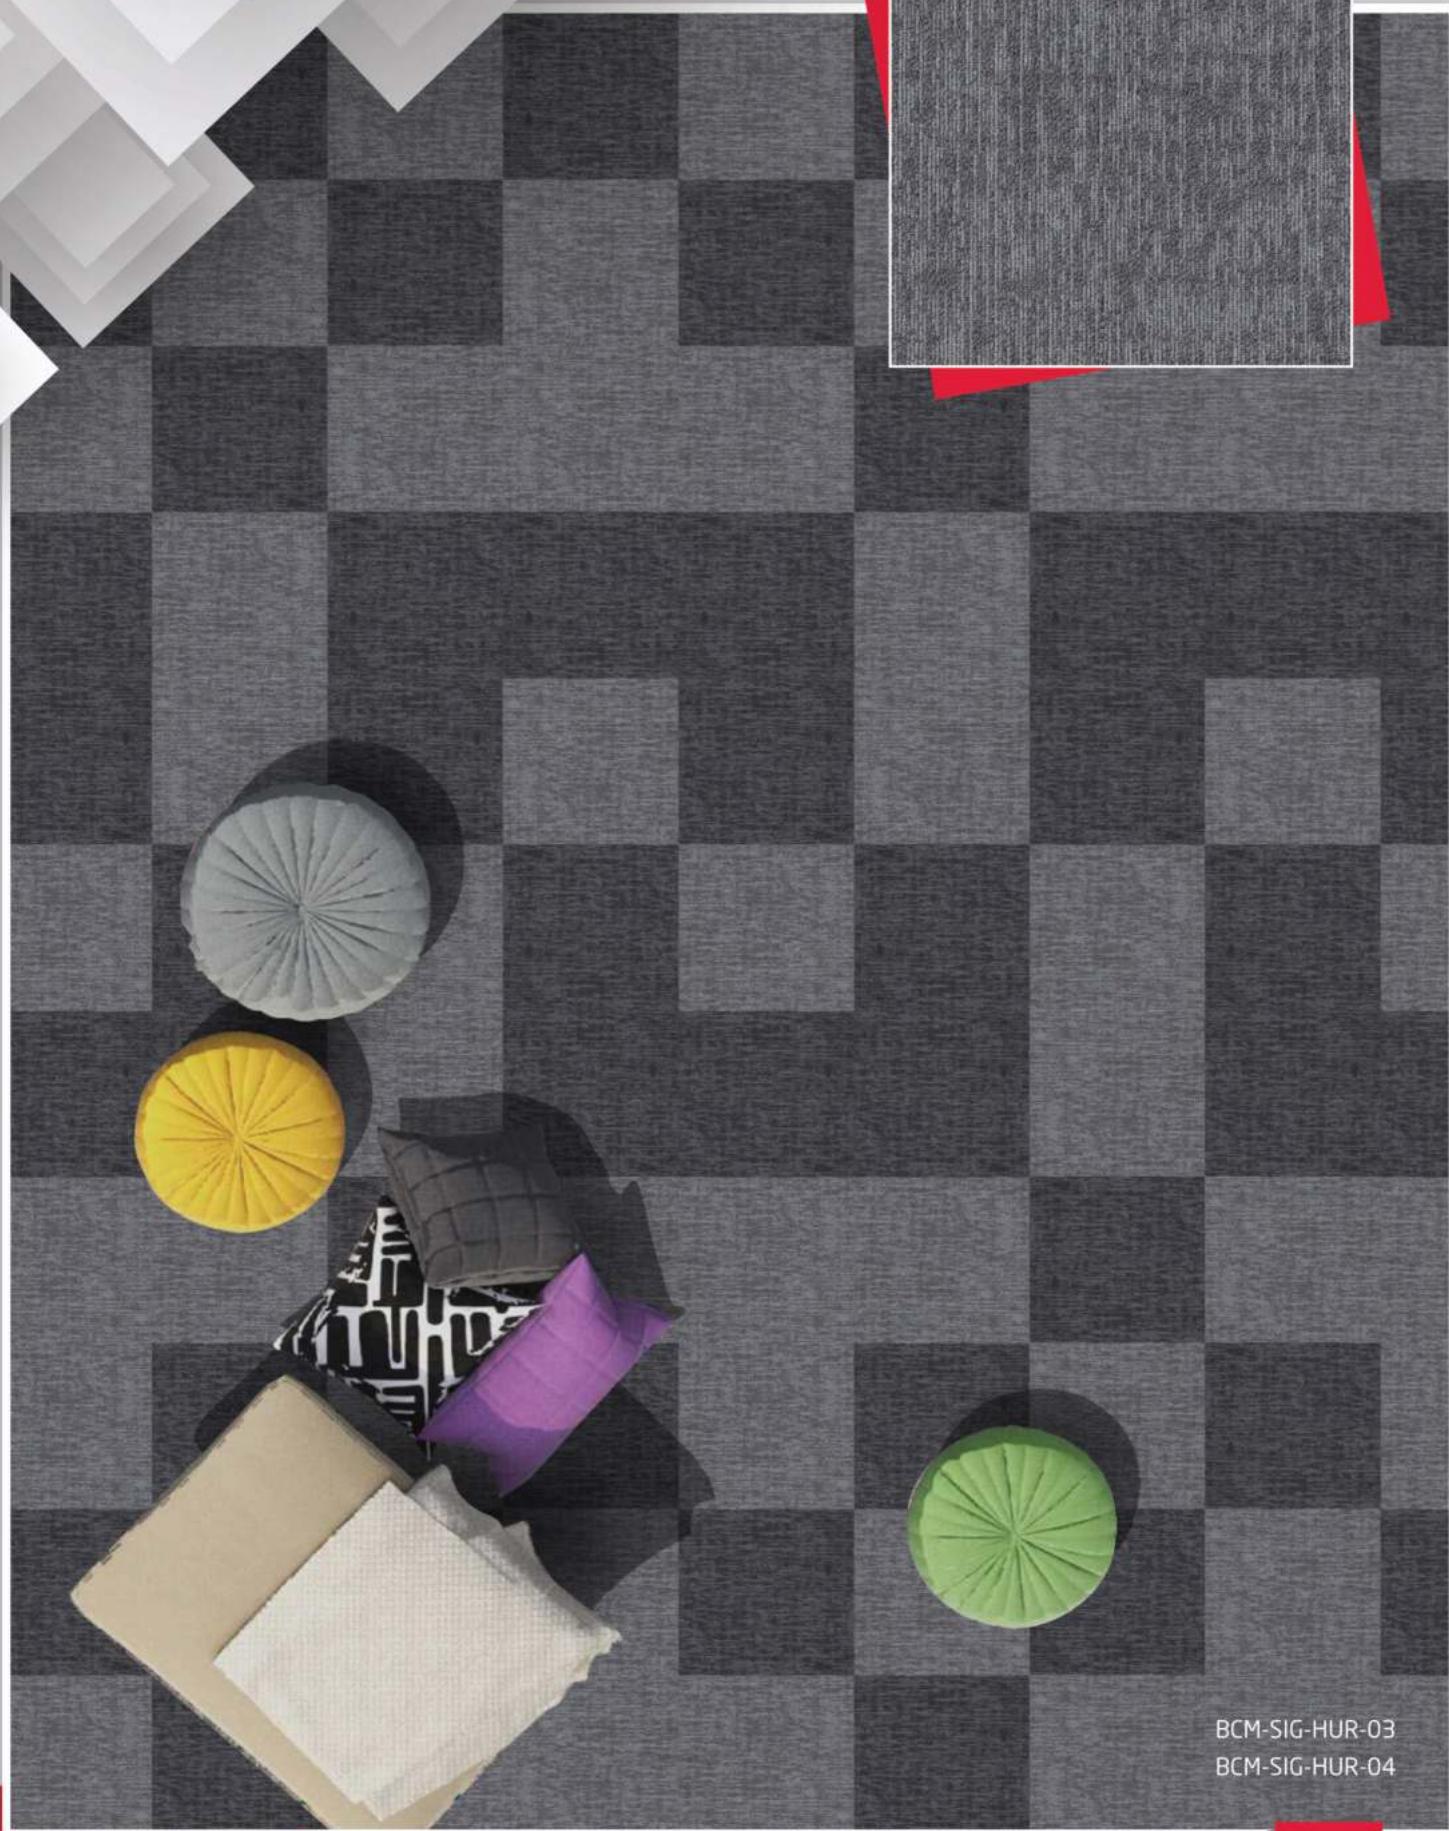


Product: Hurricane - 03  
Code: BCM-SIG-HUR-03

50cm

50cm

TILE

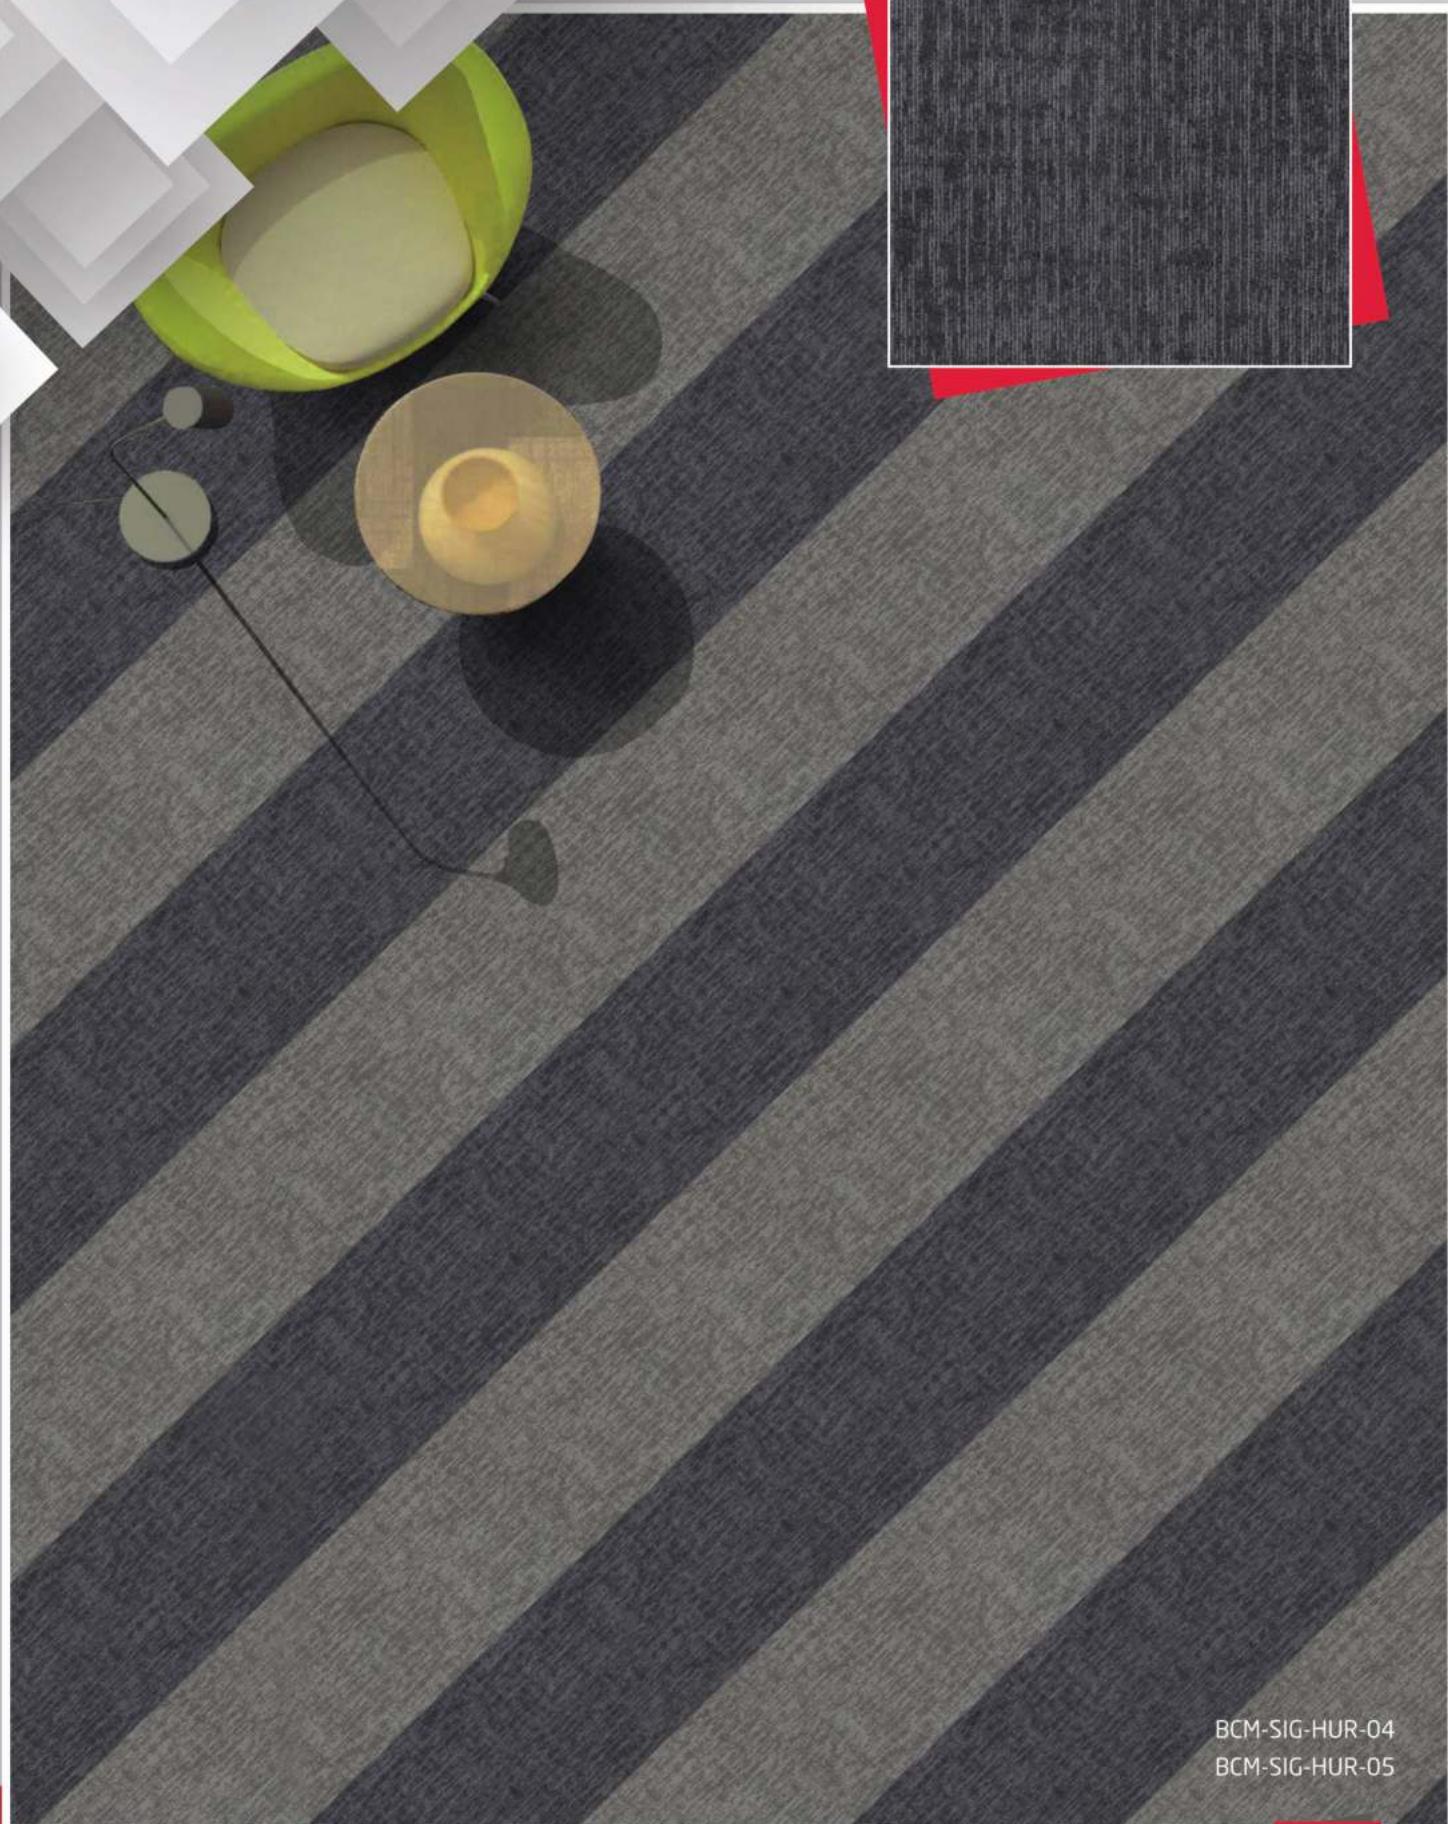

BCM-SIG-HUR-04  
BCM-SIG-HUR-05

Product: Hurricane - 04  
Code: BCM-SIG-HUR-04

50cm  
50cm  
TILE



Product: Hurricane - 05  
Code: BCM-SIG-HUR-05

BCM-SIG-HUR-05  
BCM-SIG-HUR-04  
BCM-SIG-HUR-03

50cm  
50cm  
TILE


## Sustainability

All BCM carpets, we understand the importance of doing our part to protect the environment and we are proud to place sustainability at the heart of our business.

All of our carpets use 100% Solution Dyed Fiber, which uses almost no water and reduces water pollution when compared to other dyeing methods by nearly 99%

## SIGNATURE COLLECTIONS

### NYLON COMMERCIAL CARPET TILES

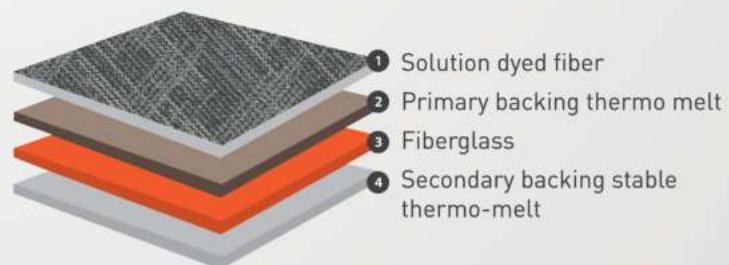

# HURRICANE - TDS

SIGNATURE  
COLLECTIONS  
NYLON COMMERCIAL CARPET TILES

## SPECIFICATIONS

Description	Nylon Carpet Tile
Construction	Tufted Textured Loop
Face Fiber	100% Nylon BCF Solution-dyed
Pile Height	4+/-0.3mm
Total Height	6.5+/-0.3mm
Pile Weight	450+/-5%g/m2
Gauge	1/12"
Primary Backing Cloth	Non-woven Polyester Spunbonded
Backing	PVC with Glass Fiber
Size	50 x 50 cm



## TESTING

CRI Green Label Plus		GLP1879
Colorfastness to Light	AATCC 16-03	Rating 5.0
Colorfastness to Water	AATCC 107-02	Rating 5.0
Colorfastness to Cleaning	AATCC 138-00	Rating 5.0
Colorfastness to Crocking	AATCC 165-99	Rating 5.0
Stain Resistance	AATCC 175-03	Rating 10
Compression force deflection	ASTM D 3574	80.7 Lbs/inch2
Smoke density (flaming)	ASTM E 662	102
Smoke density (non-flaming)	ASTM E 662	424
Loose laid	BS 4790-1987	Low Radius
Edge Ravel	ASTM D 7267	0.5 Lbs
Surface Flammability	ASTM D 2859	DOC FF 1-70
Radiant Flux	ASTM E 648	Class I
Tuft bind	ASTM D 1335	10.6Lbs
AACHEN dimensional stability	ASTM D 7570	MT4: 0.091% CT4:0.008%
Electrostatic propensity AATCC 134		0.5kv
Accelerated soilin	ASTM D 6540	Rating 5.0

## PERFORMANCE

Wear Classification	Heavy commercial
Wear Warranty	10 Years

10 Years	LIFETIME	LIFETIME	LIFETIME
Stain Resistance Warranty	Soil Resistance Warranty	Colour Fastness Warranty	



Quarter Turn