


Technical guide.



Total thickness	EN ISO 24346	5 mm	
Dimensions	-	1326 x 204 mm	612 x 612 mm
Thickness of the wear layer	EN ISO 24340	0,55 mm	
Click system	-	DreamClick®	
Total weight	EN ISO 23997	5,61 kg/m ²	
Usage classification	EN ISO 10582	23/33	
Integrated underlay	-	-	
Underfloor heating	EN ISO 12524	Suitable max 27°C (80°F) electrical floorheating systems max 60 W/m ²	
Castor chair	EN ISO 4918	Pass	
Fire resistance	EN ISO 13501-1	Bfl-s1	
Chemical resistance	EN ISO 26987	OK	
Thermal resistance	EN ISO 8302	0,0315 m ² K/W	
Residual indentation	EN ISO 24343-1	< 0,10	
Slip resistance	DIN 51130	R10	
	EN ISO 13893	Class DS	
RRL pendulum test: dry	CEN/TS 15676	76	
RRL pendulum test: wet	CEN/TS 15676	50	
Sound reduction: impact sound	EN ISO 717-2	10 dB	
Reflected walking sound	EN ISO 16205	80 dB	
Light fastness	EN ISO 105-B02	> 6	
Dimensional stability	EN ISO 23999	≤ 0,15 %	
Antistatic	EN ISO 1815	yes	
Residential warranty	-	Lifetime	
Commercial warranty	-	10 year	
Formaldehyde	EN ISO 717-1	E1	
VOC emission		Indoor air comfort GOLD	

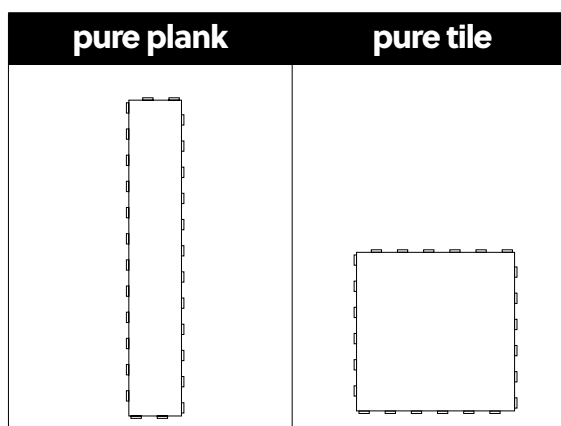

	contains	m ²	ft ²	weight
1 pack Pure planks	8 planks	2.16 m ²	23.24 ft ²	12.5 kg
1 pallet Pure planks	56 packs	120.96 m ²	1301.53 ft ²	700 kg
1 pack Pure tiles	6 tiles	2.25 m ²	24.21 ft ²	12.97 kg
1 pallet Pure tiles	28 packs	63 m ²	677.88 ft ²	363 kg